



METRO PARK WOOD
RIGIDFORM™ SPC

Milliken™



Metro Park

Metro Park RigidForm™ SPC pairs classic, natural aesthetics with modern materials and engineering—enhancing performance characteristics while keeping you connected to nature.

IT CALLS TO US



PIKE



HERITAGE
WOOD



EUCALYPTUS
SALIGNA



KOKUTAN



SHENANDOAH



APPLEWOOD



CHARTER OAK



BEECH



LIVE OAK



HICKORY



GOLDEN OAK



ROYAL OAK



UNSW Student Service and Library - Faculty of Arts, Design and Architecture, Sydney, New South Wales | MCA Architects
Photographer: Karina Saris
Live Oak in Jacobean | LOK18 | Ashlar (Vertical) Installation



Porirua Club, New Zealand
 Top to Bottom: Exceed in Energy, Thunder Black (ENE119-174) and Metro Park in Beech, Grove (BEH21-121)
 Brick (Horizontal) Installation and Ashlar (Vertical) Installation Respectively



Porirua Club, New Zealand
 Left to Right: Metro Park in Beech, Grove (BEH21-121) and Exceed in Energy, Thunder Black (ENE119-174)
 Ashlar (Vertical) Installation and Brick (Horizontal) Installation Respectively





Pike in Cloud | PKK144 | Ashlar (Vertical) Installation



Pike in Cloud
PKK144

Eucalyptus Saligna in Koala
ECS122



Eucalyptus Saligna in Koala | ECS122 | Ashlar (Vertical) Installation





Royal Oak in Knight | ROK176 | Ashlar (Vertical) Installation



Royal Oak in Knight
ROK176

Kokutan in Kuro
KKT145



Kokutan in Kuro | KKT145 | Ashlar (Vertical) Installation







Pike in Dew | PKK121-204 | Ashlar (Vertical) Installation



Pike in Dew
PKK121-204



Golden Oak in Amber
GOK22



Golden Oak in Amber | GOK22 | Ashlar (Vertical) Installation






QUICK REFERENCE GUIDE

PIKE



TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)

COLOURS




-  **Cloud** PKK144
-  **Dew** PKK121-204
-  **Antler** PKK124-208

HERITAGE WOOD




TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)

COLOURS



-  **Honor** HTG218
-  **Pride** HTG208
-  **Legacy** HTG145

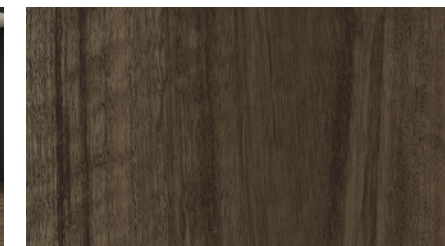EUCALYPTUS SALIGNA




TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)

COLOURS



-  **Koala** ECS122
-  **Wombat** ECS114

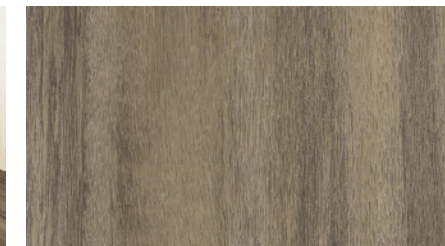KOKUTAN



TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)


COLOURS

-  **Bokken** KKT121
-  **Kuro** KKT145

QUICK REFERENCE GUIDE


SHENANDOAH




TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Moose** SHN145


LIVE OAK




TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Jacobean** LOK18


APPLEWOOD

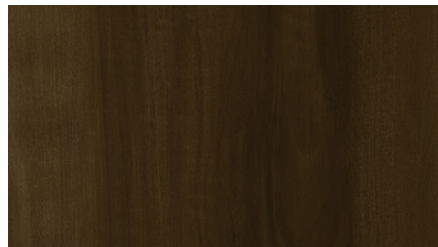

TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Cider** APL77


HICKORY

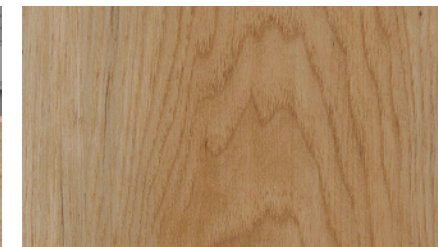


TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Parchment** HCR22-20


CHARTER OAK



TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Smoke** COK144

GOLDEN OAK

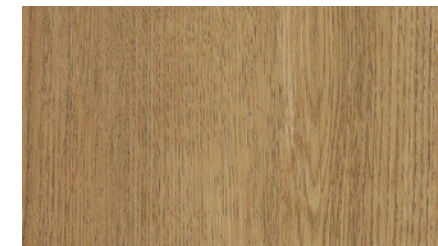


TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Amber** GOK22

BEECH



TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Grove** BEH21-121

ROYAL OAK

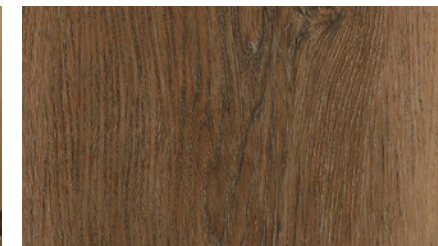


TILE SIZE
7.14" x 48.6" (18.14cm x 123.50cm)
COLOURS
 **Knight** ROK176

STYLE BACKED BY PERFORMANCE

Milliken Floor Covering offers products and expertise in all areas of your commercial spaces, including high-performance entryway systems, modular carpet and Hybrid Flooring System. Simplify your flooring projects by working with a trusted partner that lets you focus on enjoying the process of creating a great space.

RIGIDFORM™ SPC CONSTRUCTION

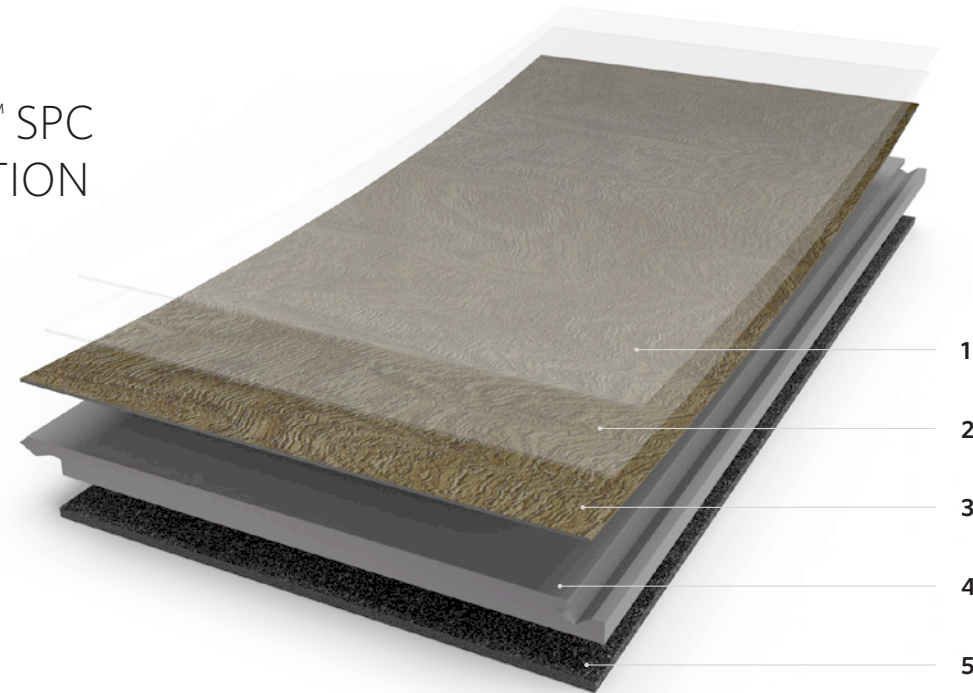

Wear Layer Thickness
0.55 mm

- 1. PROGUARD™ REINFORCED POLYURETHANE**
Provides superior stain and scratch resistance, eliminates the need for polishes/waxes, for reduced maintenance costs and improved Indoor Air Quality (IAQ) performance.
- 2. WEAR LAYER**
Transparent embossed 0.55 mm wear layer provides protection and appearance retention in demanding commercial environments.
- 3. PRINTED LAYER**
High-resolution printed film delivers stunning realistic visuals of wood and stone.
- 4. SECURELOCK™ RIGID LAYER**
This stable layer provides unsurpassed durability that also hides subfloor imperfections, with a locking mechanism that allows for quick and easy adhesive-free installation.
- 5. INTEGRAL ACOUSTIC BACKING**
Pre-attached underlayment minimises sound, is shock absorbent, provides comfort underfoot and further assists with concealment of subfloor imperfections.

SPC that works harder *and* smarter



RIGIDFORM

- Holds heavy loads, i.e. lobby desks
- No acclimation or deformation from temperature
- Can install on raised floor
- Acoustic layer attached, reduce noise transmission, improve underfoot comfort



SECURELOCK

- Strong and durable edge profile
- Waterproof locking mechanism
- Easy installation
- Adhesive-free installation, improve indoor air quality



PROGUARD

- Scratch- and scuff-resistant
- Resists stains and chemicals
- Easy maintenance, no need for polish/wax



SUSTAINABILITY

In keeping with Milliken's long-standing culture of sustainability, our Hybrid Flooring System products are 100% Ortho-Phthalate free. They do not contain problematic post-consumer recycled material. Further, Milliken's Hybrid Flooring System is certified to the most stringent global environmental standards.



WARRANTY

Milliken Hybrid Flooring System products are backed by a 15-year Heavy Commercial & Lifetime Wear Warranty, ensuring quality and giving peace of mind.



MOISTURE MANAGEMENT

Our RIGIDFORM™ SPC Tiles are water proof flooring materials, which can be installed adhesive free with Milliken's SECURELOCK system.



METRO PARK WOOD

RIGIDFORM™ SPC

SPECIFICATION



When you choose M/PACT™ products, you can be sure your choice is carbon neutral. M/PACT™ carbon neutral products offset the raw materials and manufacturing carbon footprint* by using 3rd party Verified Carbon Standard Credits that support renewable energy and carbon reduction technologies to help fight climate change.
 *as calculated and verified through a ISO14025/ISO14040 compliant LCA and published in third party EPD.

Standard Backing

Integrated Cushion Backing: Pre-attached underlayment minimises sound, is shock absorbent, provides comfort underfoot and further assists with concealment of subfloor imperfections.

Acoustic Value

Impact Sound Pressure Level - Ln,w = 58dB

Construction	High Performance Rigid Core Flooring	Heat Stability of Colour Change (ASTM F1514)	PASS
Finish	ProGuard Reinforced Polyurethane Coating	Light Stability (ASTM F1515)	PASS
Wear Layer Thickness	0.55mm	Static Coefficient of Friction (ASTM D2047)	PASS
Tile Size	7.14" x 48.6" (18.14cm x 123.50cm)	Determination of Dimensional Stability & Curling after Exposure to Heat (ISO 23999)	PASS
Overall Thickness	6.2mm	Resistance to Chemicals (ASTM F925)	PASS
Edge Profile	Micro Bevel	Static Load Limit (ASTM F970) Environmental	PASS
Recyclable	100%		Declare
Pieces Per Box	9 pc		Carbon Neutral
Weight Per Box	20.6kg		GreenRate by Global Green Tag
Quantity Per Box	2.02m ²		Best Practice PVC
Critical Radiant Flux	9.6 kW/m		Environmental Product Declaration (EPD)
Smoke Density	154%.min		
Slip Resistance Classification	P3 & R10		

Recommended Installation Method(s)
 Recommended Area of Use
 Warranties

SecureLock™ locking mechanism
 Commercial | Residential
 15-year Wear Warranty



Alliance Founding Member



Milliken

Heritage in Honor | HTG218
 Ashlar (Vertical) Installation

Australia:
 Toll Free: 1800 668 372

New Zealand:
 Toll Free: 0800 668 372

www.millikenfloors.com.au
 (Australia & New Zealand)

Milliken Hybrid Flooring System is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken Hybrid Flooring System is 100% ortho-phthalate-free. Milliken Hybrid Flooring System is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.