






OBEX® ZONE ENTRY SYSTEM

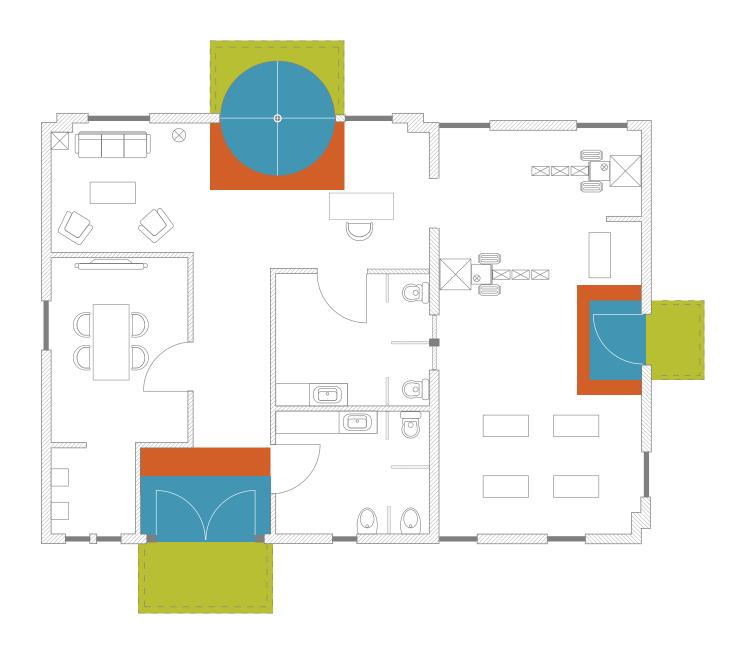

ZONE 1

OUTDOORS: The area just before the building access—ideal for placing a product with scraping action to remove grit and heavy dirt particles such as sand and snow.

Milliken Product Solutions: Prior™ and Tergo™



INDOORS: The primary area just inside the building where a product with dual action—scraping and absorbing—should be installed to defend against dirt and moisture. This area often features a recessed matwell.

Milliken Product Solutions: Tergo™, Forma™ 2.0, Quadrus Brush, and Sepio




INDOORS: Secondary area inside the building after Zone 2. A textile product for moisture absorption is the preferred choice. Also applicable to circulation areas other than entrances.

Milliken Product Solutions: Quadrus, Quadrus Brush, and Sepio

AEGIS



AEG118-133 CASTLE



AEG153-133 SHIELD



AEG19-133 ZAFFRE




AEG26-133 TURRET

RAMPART



RAM118-133 CASTLE



RAM153-133 SHIELD



RAM19-133 ZAFFRE



RAM26-133 TURRET

Have you seen our other collections? Visit us online today.









Arx





Quadrus



LVT

Construction

Tufted, Textured Loop

Tile Size

50 cm x 50 cm (19.7" x 19.7")

Yarn Type

50% ECONYL® SDN Type 6 Multifilament, 50% SDN Type 6 Mono- and Multifilament

Tufted Face Weight

Aegis: 27.6 oz/yd² (936 g/m²) Rampart: 28.2 oz/yd² (956 g/m²)

Finished Pile Height

Aegis: 0.254 in (6.45 mm) Rampart: 0.256 in (6.50 mm)

Average Density

Aegis: 5,678 Rampart: 5,678

Standard Backing

PVC-Free Underscore™ ES Cushion Underscore™ is available with TractionBack®

ADA Compliant

Recommended Installation Method



MONOLITHIC







This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice.

Growing greener for over 100 years.

Visit milliken.com for more information.