





Eero Blueprint

The Eero Blueprint pattern seamlessly merges the intricate art of architectural blueprints with the legacy of reclaimed wood from architectural salvage yards. This collection prioritizes the preservation of each piece's distinctive character and historical essence, while seamlessly integrating them into innovative modern architectural concepts.

Eero Blueprint in Salvage, ashlar installation


FORT WI

LAKE SU

PATTERN EXPLANATION

Eero Blueprint

Celebrating the craftsmanship of detailed blueprints, it accentuates the uniqueness of reclaimed wood, fostering a harmonious blend of history, precision, and creativity in every design. This design has a multi-tile repeat.

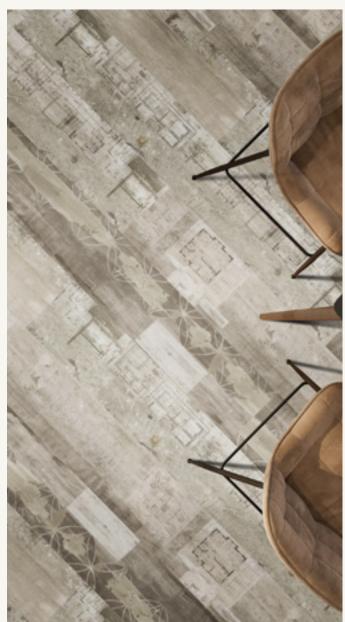

EERO BLUEPRINT IN SALVAGE



COLORS

Eero Blueprint


Tile Size: 152.4 CM * 22.8 CM







EER234-209-215 Diagram

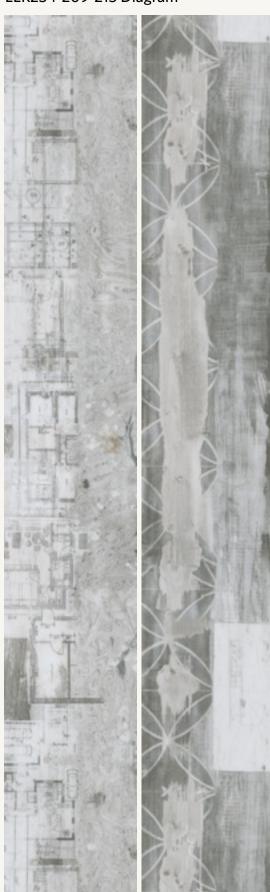



Raw Wood

Raw Wood serves as a pure foundation for crafting distinctive design expressions that seamlessly meld with its coordinating patterns. The pattern embraces the raw, unembellished texture of wood, inviting you to imprint their individual creativity onto its versatile surface.





Raw Wood in Earthy, ashlar installation

COLORS

Raw Wood

Tile Size: 152.4 CM * 22.8 CM

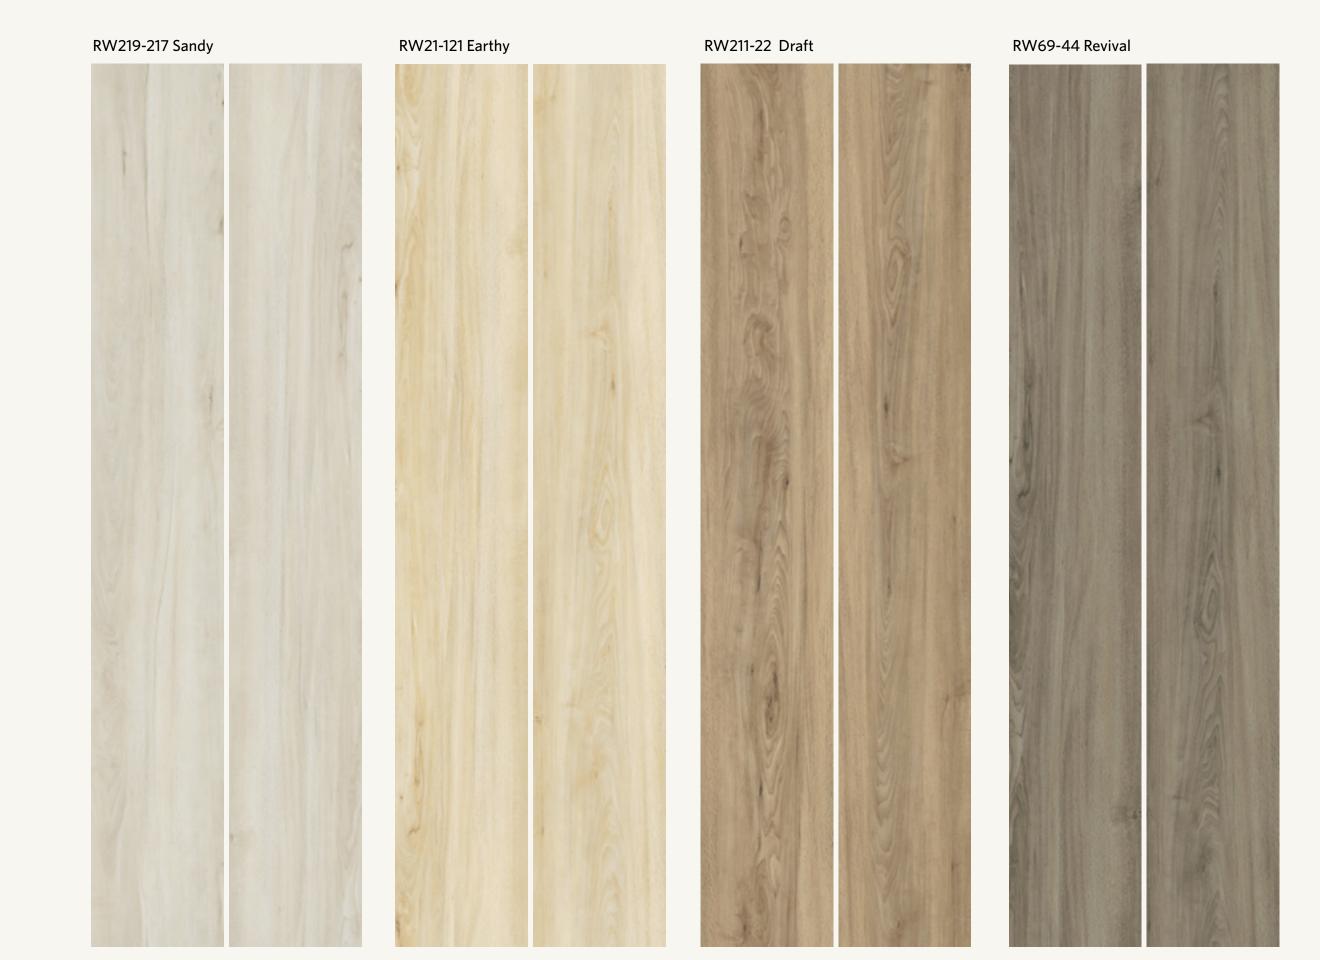

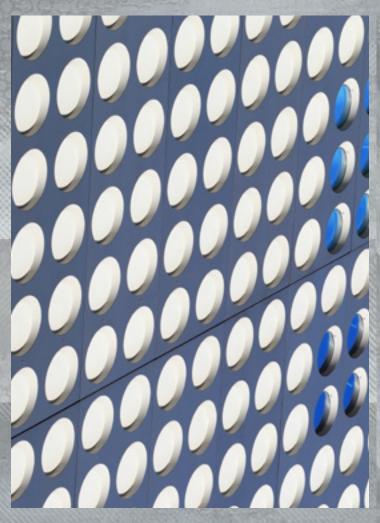

Overprint

The Overprint design artfully combines the timeless essence of stone with a contemporary graphic pattern, resulting in a design that epitomizes the concept of overprinting. By layering the inherent character of stone with a modern graphical motif, this collection achieves a captivating juxtaposition of styles.



Overprint in Interlaced, ashlar installation


OP235-218 Mosaic


Overprint


Tile Size: 152.4 CM * 22.8 CM

The Overprint planks invite the viewer to appreciate the interplay between tradition and innovation, where the raw beauty of stone is invigorated by the energy of a modern aesthetic.



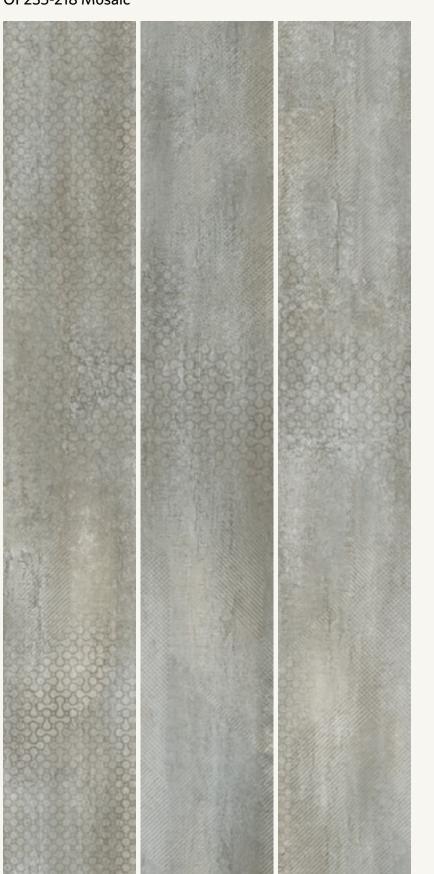

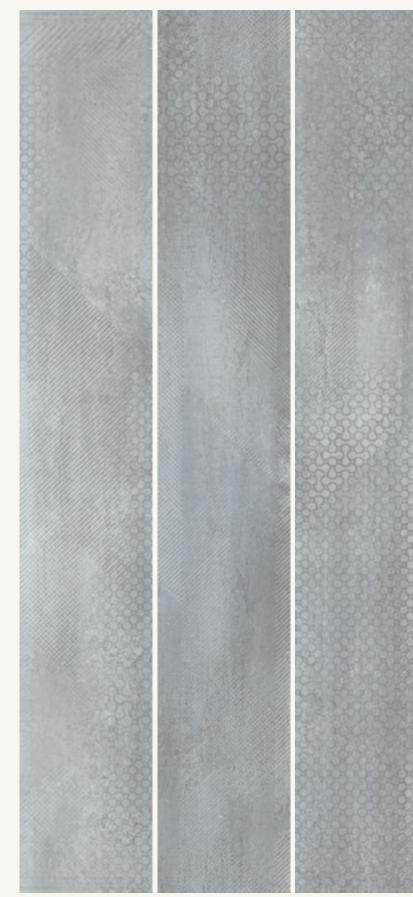

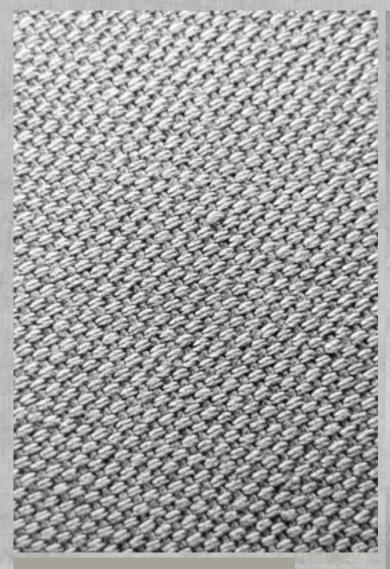


Woven Stone

Woven Stone is a combination of a woven textile entertwining with a stone-like texture, capturing the essence of a harmonious interplay between fabric and stone, crafting a design narrative that transcends traditional boundaries



Woven Stone in Blend, ashlar installation

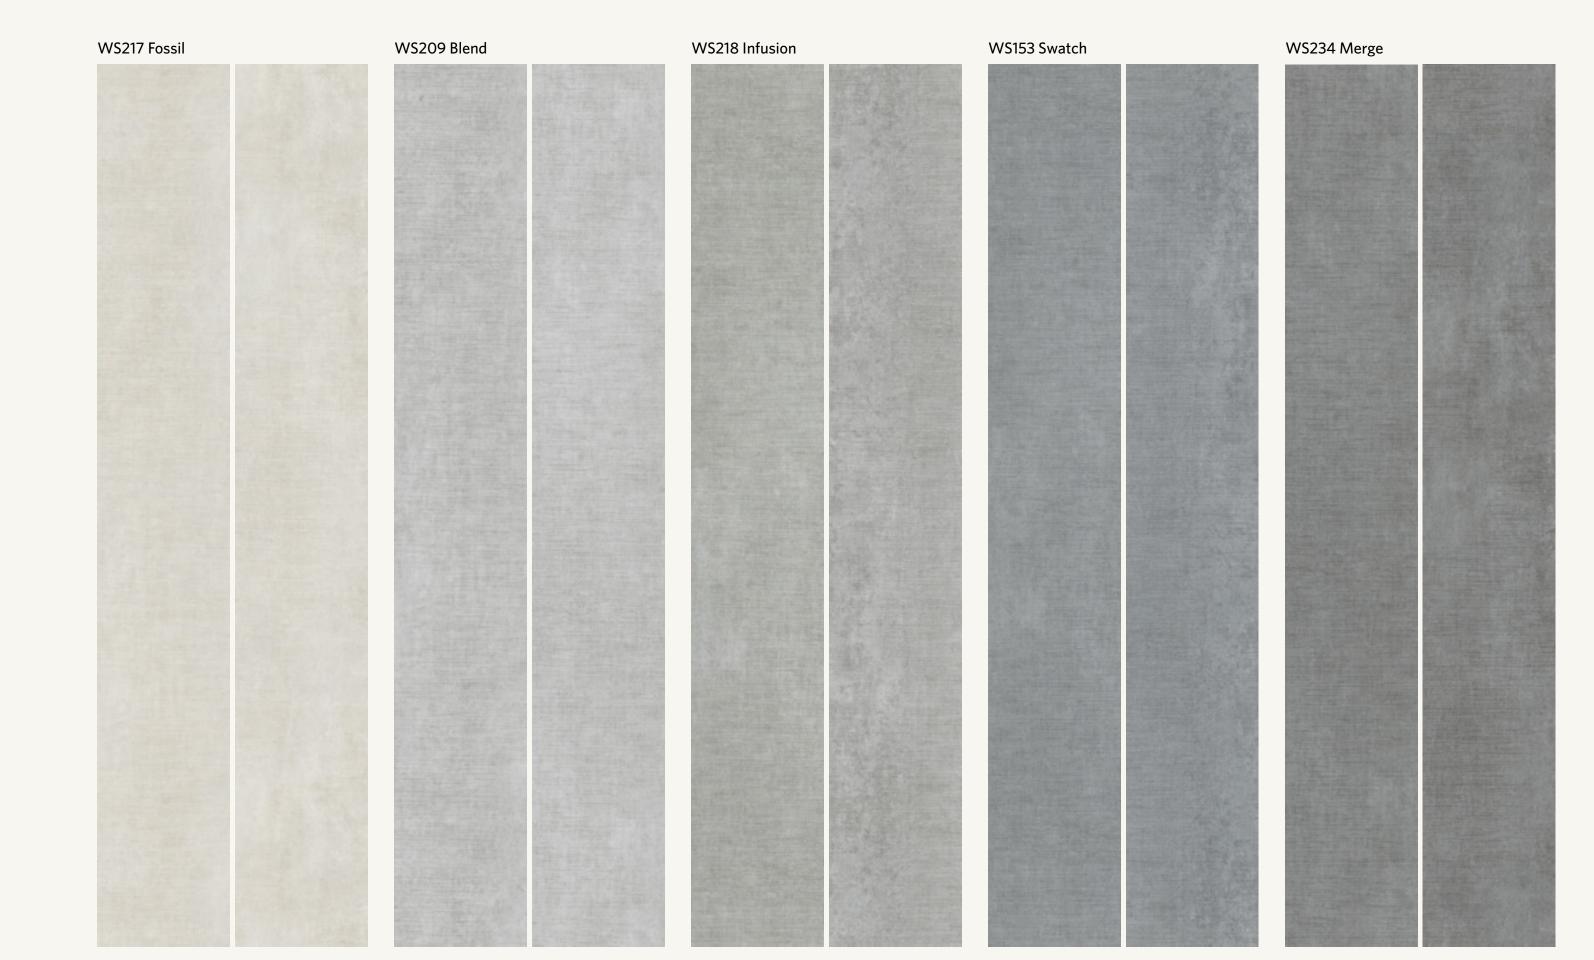

COLORLINE

Overprint



OP251-217 Layered



OP235-218 Mosaic



OP209-215 Interlaced

Woven Stone



WS217 Fossil



WS209 Blend



WS218 Infusion



WS153 Swatch



WS234 Merge

Raw Wood



RW219-217 Sandy



RW21-121 Earthy



RW211-22 Draft



RW69-44 Revival

Eero Blueprint



EER114-121-207 Sketch



EER217-44-251 Salvage



EER44-213-208 Restored



EER234-209-215 Diagram



Offering 4 color group design for different working space, hospitality, and education area.







Product Coordination



Hues 2.0 SAT144-6-135 Saffron

WS209 Blend





Offering 4 color group design for different working space, hospitality, and education area.









Offering 4 color group design for different working space, hospitality, and education area.







Product Coordination



Mixed Formations GUN210-206-211 Tan

RW211-22 Draft





Offering 4 color group design for different working space, hospitality, and education area.















REPURPOSED MATERIALS

FLEXFORMTM LVT

Construction

High Performance FlexformTM LVT

Finish

ProGuard™ Reinforced Polyurethane Coating

Overall Thickness

5mm

Wear Layer Thickness

0.55mm

Edge Profile

Micro Bevel

Tile Sizes

228.6mm x1524mm

Pieces Per Box

6

Weight Per Box

20.54kg

Quantity Per Box

2.09 m²

Critical Radiant Flux (ISO 9239-1)

≥ 4.5kW/m²

Smoke Rate(ISO 9239-1)

<750%.min

Use Classification (ISO 10582)

Class 33 Heavy Commercial

Colour Fastness to Light (ISO 105-B02)

≥ 6

Slip Resistance (DIN 51130)

R10

Dimensional Stability (ISO 23999)

≤ 0.25 % ; Curl ≤ 2mm

Resistance to Chemicals (ASTM F925)

Pass

Residual Indentation (ISO 24343-1)

≤ 0.1mm

Castor Chair Resistance (ISO 4918)

Pass

Flexibility(ISO 24344)

Pass

Warranties

15-Year Limited Commercial Wear

产品结构

高性能弹性地板

表层工艺

ProGuard™ 增强聚氨酯涂层

总厚度

5mm

耐磨层厚度

0.55mm

倒角类型

微倒角

单片尺寸

228.6mm x1524mm

每箱片数

6片

每箱重量

20.54kg

每箱数量 2.09 m²

临界辐射通量 (阻燃性) (ISO 9239-1)

≥ 4.5kW/m²

产烟量 (ISO 9239-1)

<750%.min

应用分级 (ISO 10582)

商业重度 33 级

光照色牢度 (ISO 105-B02)

≥ 6

防滑性能 (DIN 51130)

R10

加热尺寸稳定性及翘曲 (ISO 23999)

< 0.25 %;翘曲< 2mm

耐化学性能 (ASTM F925)

通过

残余凹陷 (ISO 24343-1)

≤ 0.1mm

脚轮椅测试 (ISO 4918)

通过

柔韧性 (ISO 24344)

通过

质保

15 年商用耐磨层有限质保

FLEXFORM™LVT that works Easier and Smarter



SUSTAINABILITY

In keeping with Milliken's long-standing culture of sustainability, our Luxury Vinyl Tile products are 100% Ortho-Phthalate free. They do not contain problematic post-consumer recycled material. Further, Milliken's Luxury Vinyl Tiles are certified to the most stringent global environmental standards.


For further information, visit: millikenfloors.com/sustainability



WARRANTY

Milliken Luxury Vinyl Tile products are backed by a 15 year Heavy Commercial warranty, ensuring quality and giving peace of mind.

FLEXFORM™ LVT CONSTRUCTION

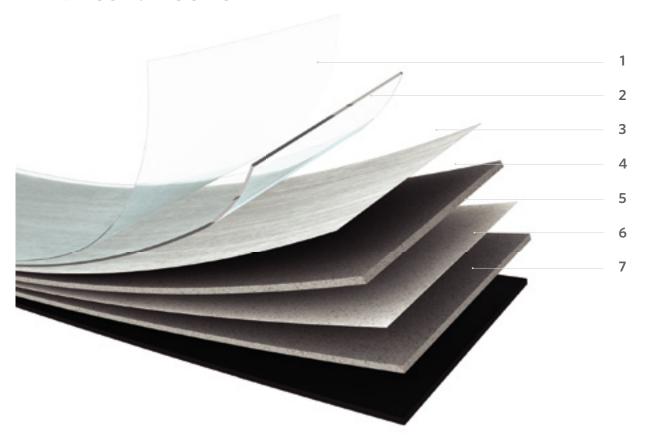

I. PROGUARD™ REINFORCED POLYURETHANE COATING

Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.

. 0.55MM TRANSPARENT WEAR LAYER

Heavy commercial grade 0.55mm transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.

B. DESIGN PHOTOGRAPHIC FILM

State of the art printing technology providing authentic visuals and designs.

4. HIGH DENSITY CORE

OVERALL THICKNESS

WEAR LAYER

THICKNESS

0.55 mm

5mm

Ensures excellent durability, stability and long term performance.

5. GLASS FIBER LAYER

Supports dimensional stability.

6. HIGH DENSITY CORE


Ensures excellent durability, stability and long term performance.

7. VINYL BACKING LAYER

Engineered balance layer provides stability and durability of the product.

VIEW REPURPOSED MATERIALS IN YOUR SPACE

Use the online visualiser to view different layouts of Repurposed Materials. Simply upload a photograph of your space and let the visualiser do the rest.

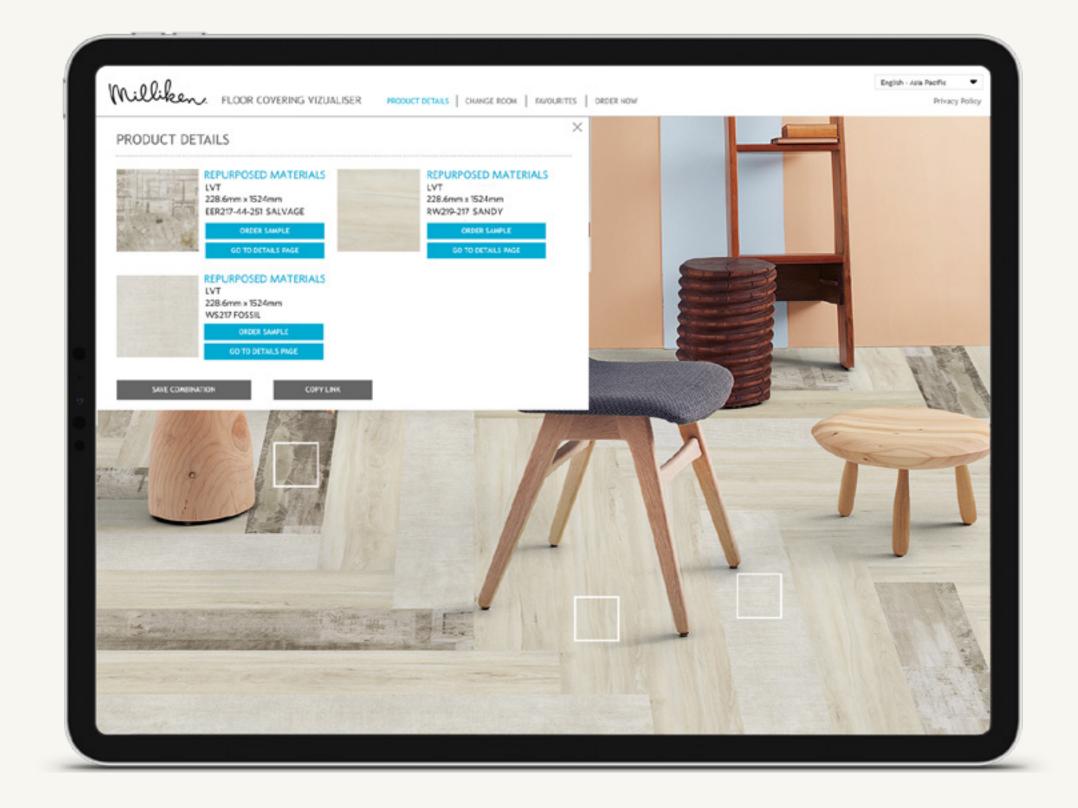

M/PACTTM

CARBON NEUTRAL PROGRAM

REPURPOSED MATERIALS A CARBON NEUTRAL COLLECTION

Climate change is one of the greatest threats facing humanity. Today, our carpet, LVT are carbon neutral everywhere in the world. We invite you to learn more about the significant changes we've made, then let's work together to design a better future.



2023 Milliken & Company | Design © Milliken & Company Eero Blueprint in Salvage, Overprint in Layered, ashlar installation

REPURPOSED MATERIALS

LVT ENVIRONMENTAL STANDARDS

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.







Declare.

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.