
AMPLIFIER



8

Milliken[®] Ontera[®]



INSPIRED. INSPIRING.

An amplifier makes performance possible. As an electronic device for increasing the amplitude and power of electric signals, the amplifier is used to increase the volume and set a memorable tone.

Inspired by four unique elements of sound - Beats, Echo, Octave, and Treble - the Amplifier collection offers subtle accents with a defined rhythmic quality, reverberation of unique ripples between different notes and the creative impulse of high-frequency sound.














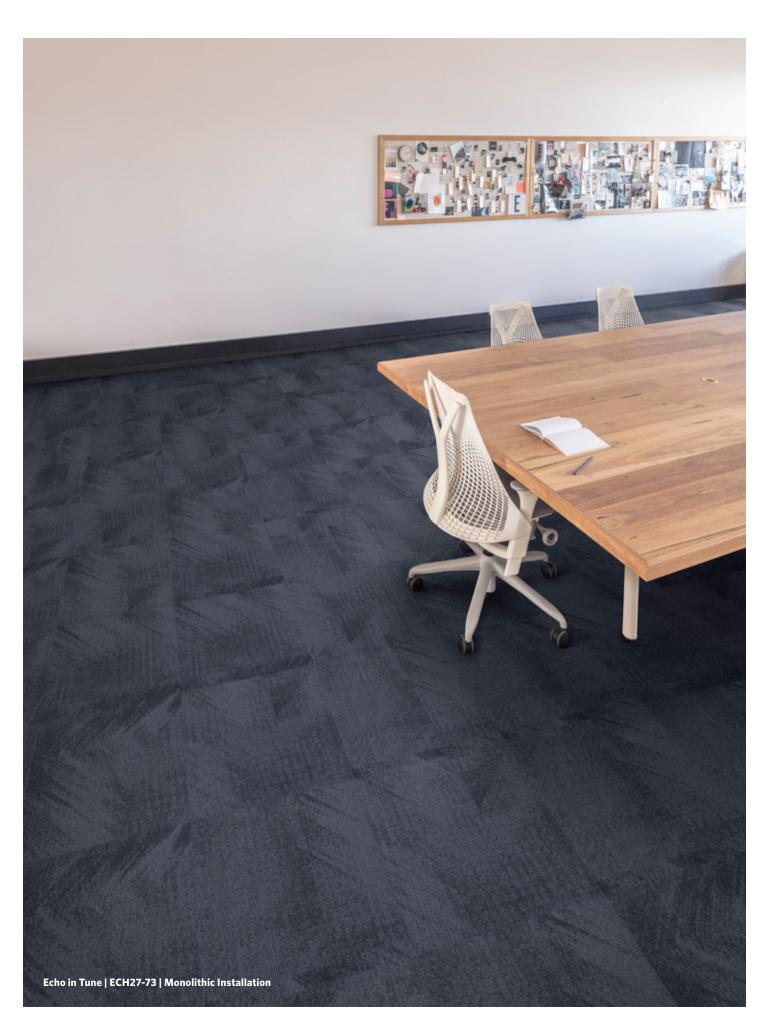


Treble in Fusion | TBL119-154 | Monolithic Installation





Octave in Pitch | OCT154-180 | Brick (Horizontal) Installation











Octave in Fusion | OCT119-154 | Brick (Horizontal) installation

=









COLOURWAY

Beats






BTS27-174 CHORD

Echo

BTS119-154 FUSION






ECH27-174 CHORD

Treble





TBL119-154 FUSION

Octave



OCT27-174 CHORD


14



BTS154-180 PITCH



BTS27-73 TUNE



ECH154-180 PITCH



ECH27-73 TUNE



TBL154-180 PITCH





OCT154-180 PITCH



TBL27-73 TUNE



OCT27-73 TUNE

AMPLIFIER BEATS | ECHO | OCTAVE | TREBLE

SPECIFICATION

Construction Tufted, Textured Loop

Tile Size 50 cm x 50 cm

Yarn Type 100% Universal® Nylon Type 6

Antimicrobial AlphaSan[®] Built-In Protection

Dye Method Solution Dyed

Tufts

Beats and Echo: 120/in² (1,858/100 cm²) Treble and Octave: 109.7/in² (1,699/100 cm²)

Gauge 1/12

Stitches Per Inch Beats and Echo: 10 Treble and Octave: 9.144

Standard Backing WellBAC[™] Function (PVC-Free) (non-reactive backing) **Nominal Total Thickness** Beats and Echo: 5.60mm Treble and Octave: 5.30mm

Pile Thickness Beats and Echo: 2.79 mm Treble and Octave: 2.00 mm

Flammability (Radiant Panel Test) Beats and Echo: CRF = 5.5kW/m²; Smoke = 98%.min Treble and Octave: CRF = 5.8kW/m²; Smoke = 80%.min

Indoor Air Quality ≤0.5 mg/m³ (GLP3200)

VOC Pass (ISO 10580:2010)

ACCS Grading Commercial Heavy Duty & Stairs (CHD3*/REHD2 6*)

ECS Grading Level 4

Environmental Declare - 3rd Party Verified RED LIST FREE

Recyclable 100%

Acoustic Rating

Recommended Maintenance Refer to the Milliken-Ontera Care & Maintenance guide Millicare[®] Care Plan available in some regions.

Applicable Warranties

15-year Product Warranty 15-year Dimensional Stability Warranty 15-year Anti-Static Warranty 15-year Castor Chair Wear Warranty

Installation Method(s)





Monolithic (Beats, Echo, Treble) Quarter Turn (Beats, Echo, Treble)



↑ ↓ → ↑

Random (Echo)







A**ll**iance Founding Member











Growing greener for over 100 years. Visit milliken.com for more information.

Printed images in this architect brochure are approximate for colour and pattern scale. Please see actual carpet samples to make your final selections.

Australia: Toll Free: 1800 668 372

New Zealand: Toll Free: 0800 668 372

www.millikenontera.com (Australia & New Zealand) Cover image Close up of golden knob guitar amplifier. © iStock.com/Sakhorn38

@ 2020 Milliken & Company ~~|~~ Design @ Milliken & Company