METRO PARK WOOD RIGIDFORM[™] SPC

Milliken[®] Ontera[®]



IT CALLS TO US




Metro Park

Metro Park RigidForm[™] SPC pairs classic, natural aesthetics with modern materials and engineering—enhancing performance characteristics while keeping you connected to nature.





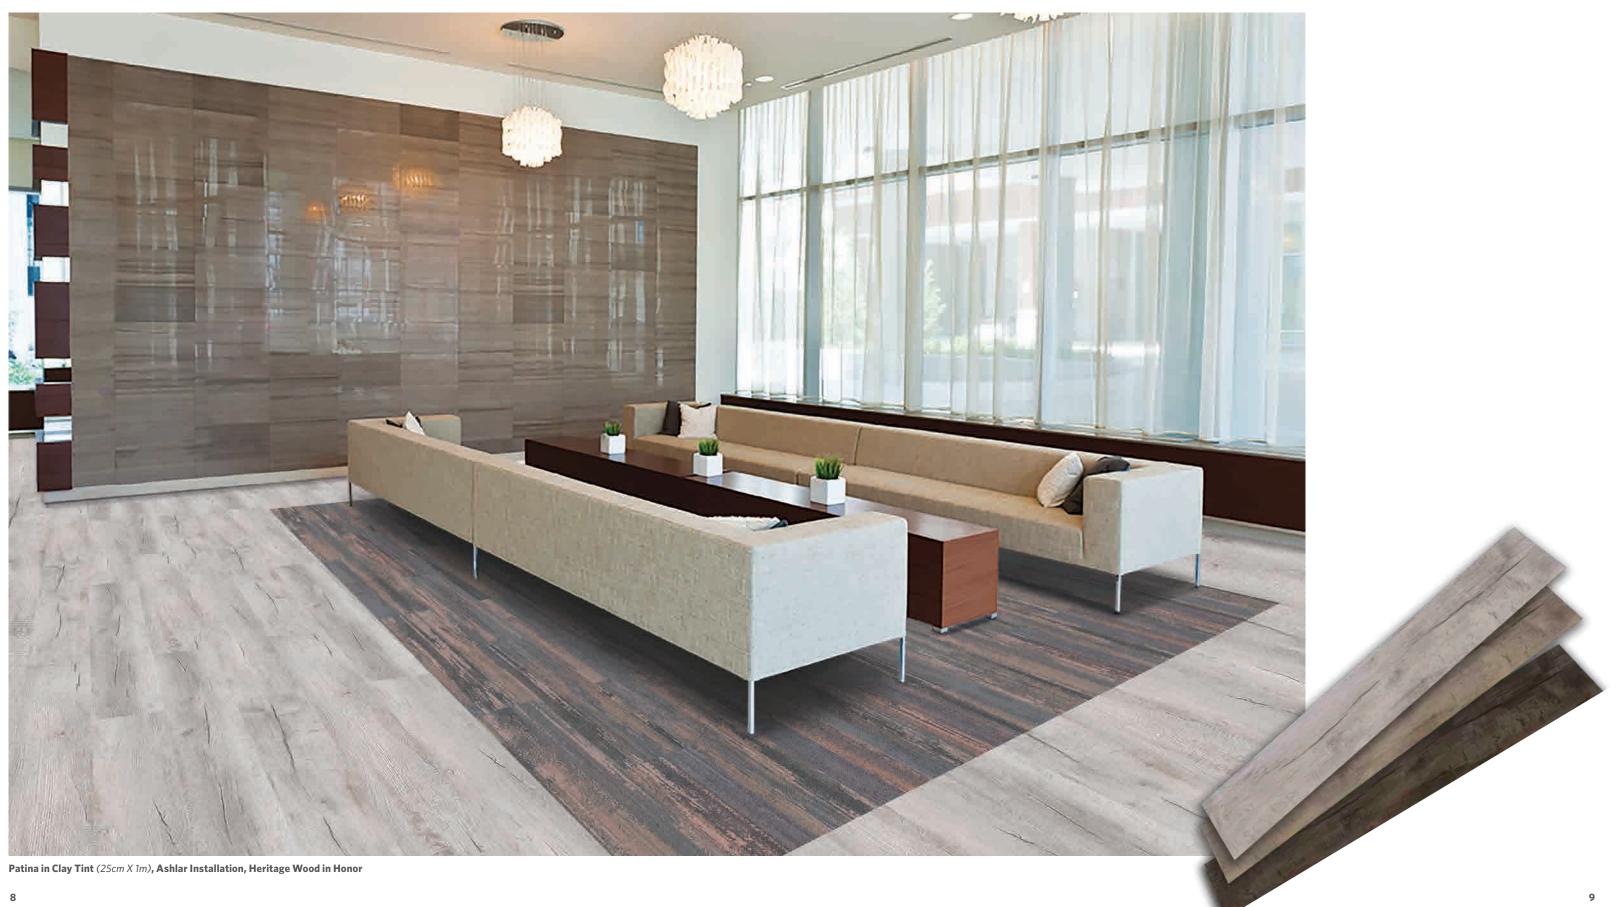

WaterFall in Marble Fluid (25cm X 1m), Ashlar Installation, Eucalyptus Saligna in Koala






















~









Golden Oak in Amber

Distressed in Timeworn, Monolithic Installation, Royal Oak in Knight




















QUICK REFERENCE GUIDE




QUICK REFERENCE GUIDE

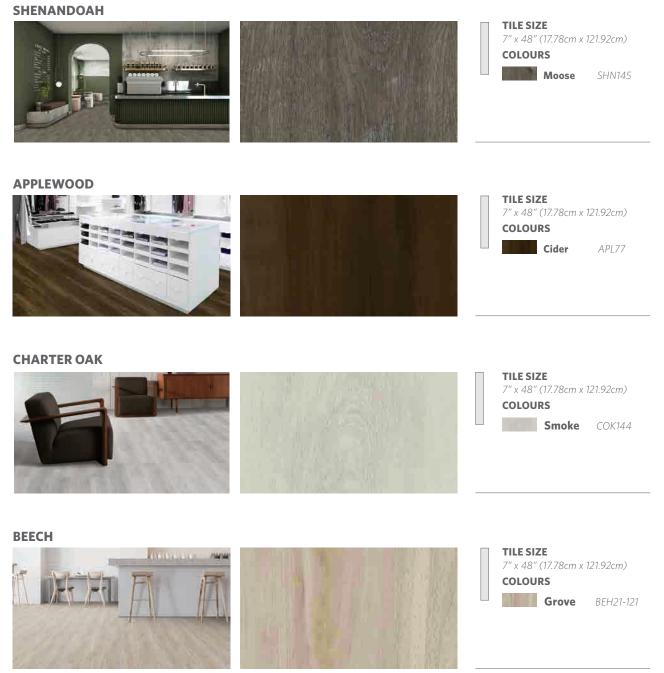

LIVE OAK



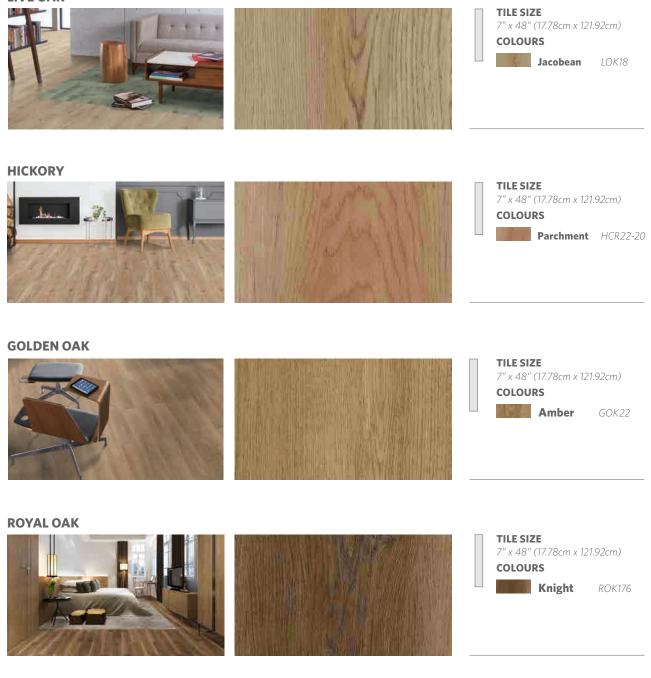





36

STYLE BACKED BY PERFORMANCE

Milliken-Ontera Floor Covering offers products and expertise in all areas of your commercial spaces, including high-performance entryway systems, modular carpet and Hybrid Flooring System. Simplify your flooring projects by working with a trusted partner that lets you focus on enjoying the process of creating a great space.

Wear Layer Thickness 0.55 mm

RIGID*FORM*[™] SPC

CONSTRUCTION

1. PROGUARD[™] REINFORCED POLYURETHANE

Provides superior stain and scratch resistance, eliminates the need for polishes/waxes, for reduced maintenance costs and improved Indoor Air Quality (IAQ) performance.

2. WEAR LAYER

Transparent embossed 0.55 mm wear layer provides protection and appearance retention in demanding commercial environments.

3. PRINTED LAYER

High-resolution printed film delivers stunning realistic visuals of wood and stone.

4. SECURELOCK[™] RIGID LAYER

This stable layer provides unsurpassed durability that also hides subfloor imperfections, with a locking mechanism that allows for quick and easy adhesive-free installation.

5. INTEGRAL ACOUSTIC BACKING

Pre-attached underlayment minimises sound, is shock absorbent, provides comfort underfoot and further assists with concealment of subfloor imperfections.

SPC that works harder and smarter



RIGIDFORM

- Holds heavy loads, i.e. lobby desks
- No acclimation or deformation from temperature
- Can install on raised floor
- Acoustic layer attached, reduce noise transmission, improve underfoot comfort



3

5

SECURELOCK

- Strong and durable edge profile
- Waterproof locking mechanism
- Easy installation
- Adhesive-free installation, improve indoor air quality



PROGUARD

- Scratch- and scuff-resistant
- Resists stains and chemicals
- Easy maintenance, no need for polish/wax



SUSTAINABILITY

In keeping with Milliken-Ontera's long-standing culture of sustainability, our Hybrid Flooring

System products are 100% Ortho-Phthalate free. They do not contain problematic post-consumer recycled material. Further, Milliken-Ontera's Hybrid Flooring System is certified to the most stringent global environmental standards.



WARRANTY

Milliken-Ontera Hybrid Flooring System products are backed by a 15-year Heavy Commercial & Lifetime Wear Warranty, ensuring quality and giving peace of mind.



MOISTURE MANAGEMENT

Our RIGIDFORM[™]. SPC Tiles are water proof flooring materials, which can be installed adhesive free with Milliken-Ontera's SECURELOCK system.

Metro Park RIGIDFORM[™]SPC

Construction - High Performance Rigid Core Flooring Heat Stability by Colour Change (ASTM F1514) - Pass **Finish** - ProGuard[™] Reinforced Polyurethane Coating Light Stability (ASTM F1515) - Pass Static Coefficient of Friction (ASTM D2047) - Pass Wear Layer Thickness - 0.55 mm **Tile Size** - 7" x 48" (17.78cm x 121.92cm) **Determination of Dimensional Stability & Curling** after Exposure to Heat (ISO 23999) - Pass **Overall Thickness** - 6.2 mm Resistance to Chemicals (ASTM F925) - Pass Pieces Per Box - 9 PCS Static Load Limit (ASTM F970) - Pass Weight Per Box - 20.6 Kg **Recommended Installation** - SecureLock[™] locking mechinism Quantity Per Box - 2.02 m² Warranty -Edge Profile - Micro Bevel 15-years Wear Warranty 1-year Manufacturing Defect Warranty Recyclable - 100% See warranty document for full details of terms and conditions. Critical Radiant Flux - 9.6kW/m² Smoke Density - 154%. min Slip Resistance Classification - P3 & R10

Acoustics (Impact Sound Insulation) - Ln,w = 58dB

LVT ENVIRONMENTAL STANDARDS

Milliken-Ontera's Hybrid Flooring System is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken-Ontera's Hybrid Flooring System is 100% ortho-phthalate-free. Milliken-Ontera's Hybrid Flooring System is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.









Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for colour and pattern scale. Please use actual product samples to make your final selections.

Australia: Toll Free: 1800 668 372

New Zealand: Toll Free: 0800 668 372

www.millikenontera.com.au (Australia & New Zealand)





Growing greener for over 100 years. Visit milliken.com for more information.

Printed images in this brochure are approximate for colour and pattern scale. Please see actual carpet samples to make your final selections.