



THE QUIETEST.


Noise is unpleasant, often causing stress which affects both mental and physical health. In workplaces with excessive noise, absenteeism can actually increase. Flooring is one of the biggest factors affecting interior acoustics and with the popularity of LVT, this can be a significant challenge for any environment.

Introducing **FLEX**FORM SOUND™ LVT

Built-in acoustic layers enable dramatic acoustic performance, reducing through-floor noise and in-room noise by **50%**.*



SCAN TO LEARN MORE ABOUT THE QUIETEST LVT ON THE MARKET.

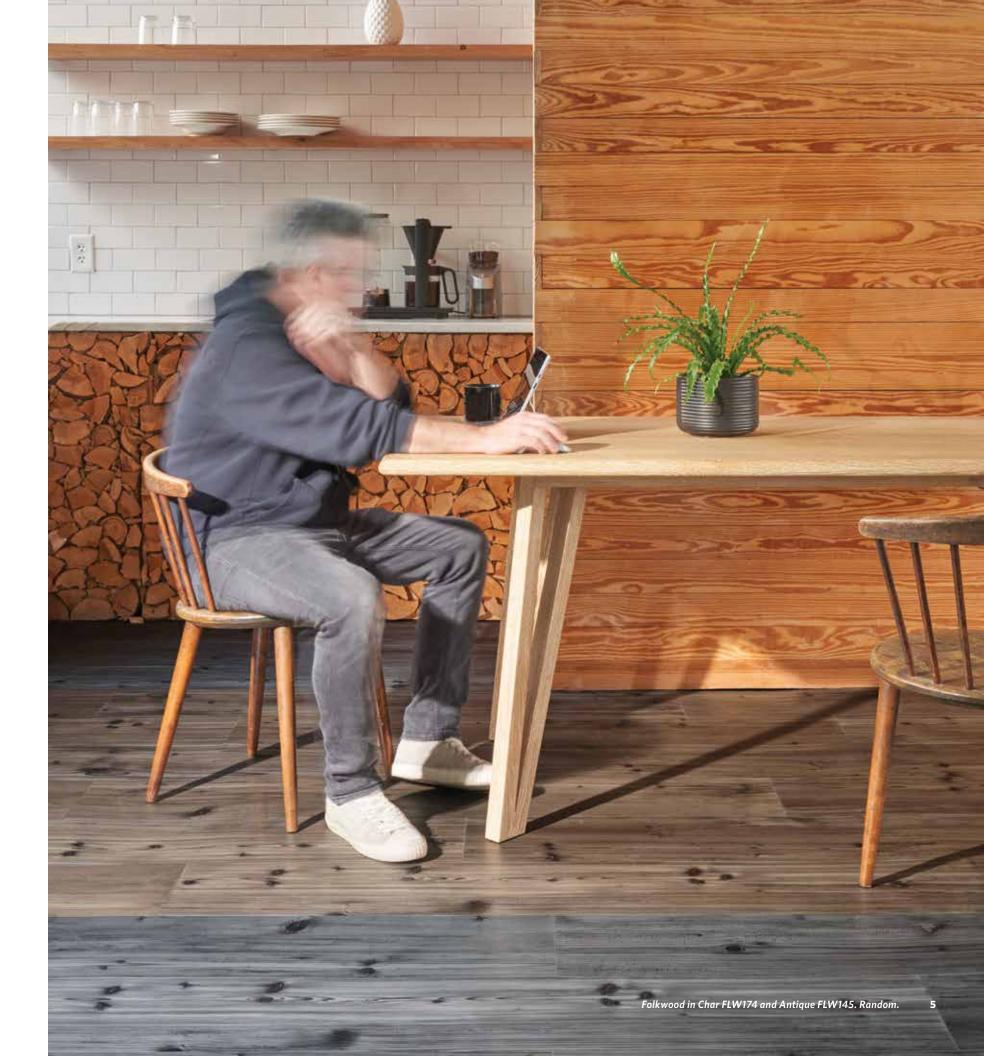














With the QuietLife collection, you can design spaces with varying degrees of serenity and energy. From minimalist to abstract- Folkwood, Longstraw and Alabaster offer a range of natural hues and dynamic colors.

LONGSTRAW



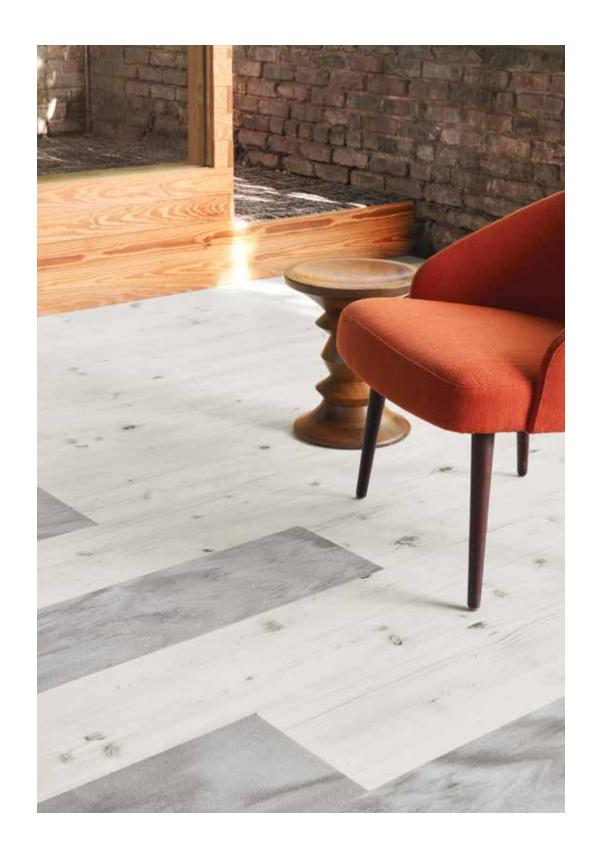







MERGE TWO SOFT, RELAXING PALETTES TO ENHANCE ANY SPACE

The Scandinavian-inspired QuietLife LVT collection pairs perfectly with the handcrafted aesthetic of the Grain+Bias carpet collection. Blend a range of neutrals, colors and textures to create cohesive spaces.

LONGSTRAW

ALABASTER





TITANIUM WHITE ALB265













QUIETLIFE

FOLKWOOD / LONGSTRAW / ALABASTER

FLEXFORM SOUND™ LVT

Construction

High Performance Luxury Vinyl Tile

Plank Size

25 cm x 150 cm (9.84" x 59.06")

ProGuard MAX[™] Coating

Wear Layer Thickness 22 mil (0.55 mm)

Overall Thickness 5.0 mm (0.197")

Edge Profile Micro Bevel

Critical Radiant Flux (ASTM E648)

Pass - >0.45 watts/cm², Class 1

Smoke Density (ASTM E662) Pass - ≤ 450

Heat Stability by Color Change (ASTM F1514) Pass - <8

Light Stability (ASTM F1515)

Static Coefficient of

Friction (ASTM D2047)
Pass - >0.5, ADA Compliant

Resistance to Chemicals (ASTM F925)

Pass - No Change Static Load Limit

(ASTM F970)
Pass - No Change

Installation Glue Down

ASTM E492 IIC Rating 51 (6" no drop ceiling) 58 (8" no drop ceiling) 54 (18" OWT with ceiling)

ASTM E90 STC Rating 52 (6" no drop ceiling) 55 (8" no drop ceiling) 60 (18" OWT with ceiling)

ASTM E2179 AIIC Rating 22 (6" no drop ceiling)

ASTM 3222 HIIC Rating 68 (18" OWT with ceiling)

Warranties 22 Year Limited Commercial Wear Warranty

1 Year Manufacturing **Defect Warranty**

Recommended Installation Methods Ashlar, Random



SUSTAINABLE FEATURES

Milliken LVT is durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% phthalate free. All production waste is granulated and recycled into backing production to create an internal closed loop recycling process. Milliken LVT is manufactured at facilities that are ISO 9001 compliant.

Milliken LVT meets many environmental standards, including FloorScore® certified, Prop 65 Free and Phthalate Free,







Declare.

Images in this brochure are approximate for color and pattern scale. Please use actual samples to make your final selections.

SHOWN ON THE COVER

(Front & Back) Alabaster in Chalice Jade ALB162. Longstraw in Cane LGS71. Random.