



QUICK REFERENCE GUIDE

LAUREL OAK



OAK145

OAK98



TILE SIZE 12" x 24"

COLORS

SER108

AGED OAK



TILE SIZE 9" x 48"

COLORS

OAK144-121

OAK217 OAK96-17

EUCALYPTUS SALIGNA



TILE SIZE

7" x 48" **COLORS** EUC114 EUC122 EUC208 EUC210

> EUC217 EUC98



TILE SIZE 5" x 48"

COLORS OAK226 SLATE



TILE SIZE 18" x1 8"

COLORS

SLT122

SLT145

SLT204 SLT209

APPLEWOOD



TILE SIZE 5" x 48"



APP121

APP77

APP206 APP22 APP224

FINE LINE



TILE SIZE 7" x 48"





TILE SIZE 7" x 48"



STONE



18" x 36" **COLORS**

TILE SIZE

STN108

STN120

CHARLOTTE



TILE SIZE 18" x 18" **COLORS**

CHT108

CHT208 CHT209 CHT212

CHT120

FISSURE OAK



TILE SIZE 9" x 48"

COLORS

FIS144-121 FIS56-20

FNL218

ROSEWOOD

RUSTIC PINE



TILE SIZE 7" x 48"



TEAK



TILE SIZE 7" x 48"

COLORS

TEA222 TEA223 TEA76

CHERRY



TILE SIZE 7" x 48"

COLORS

CHE121

CHE221

CHE136 CHE210

KOKUTAN



TILE SIZE 7"x 48"

COLORS

KOK121

KOK145 KOK176



TILE SIZE 7" x 48"

RUS124

RUS176

RUS214

RUS227



TWIST




TILE SIZE 18" x 18"

COLORS

TWS209 TWS217

	SHIPPING INFORMATION			
Pattern	Size	Pieces/Box	SF/Box	Boxes/Pallet
Serpeggiante	12" x 24"	18 Pieces	36 SF	54 Boxes (1,944 SF)
Charlotte, Slate & Twist	18" x 18"	16 Pieces	36 SF	56 Boxes (2,016SF)
Stone	18" x 36"	9 Pieces	40.5 SF	50 Boxes (2,025 SF)
Applewood & Oak	5" x 48"	21 Pieces	35 SF	56 Boxes (1,360 SF)
Cherry, Eucalyptus Saligna, Rustic Pine, Teak, Fine Line, Laurel Oak, Kokutan, Rosewood & Rosecliff Cherry	7" x 48"	15 Pieces	35 SF	55 Boxes (1,925 SF)
Fissure Oak & Aged Oak	9" x 48"	12 Pieces	36 SF	56 Boxes (2,016 SF)



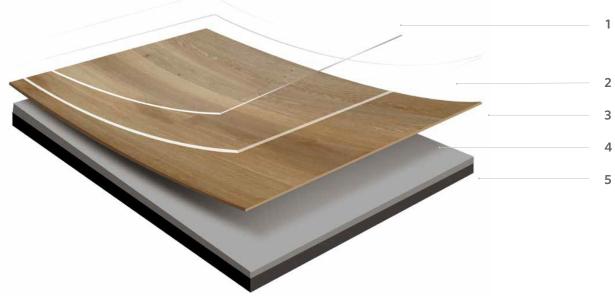

OVERALL THICKNESS 2.5mm (.098")

I. PROGUARD™ REINFORCED POLYURETHANE COATING

Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.

2. WEAR LAYER

Heavy commercial grade transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.

3. PRINTED LAYER

State of the art printing technology providing authentic visuals and designs.

4. HIGH PERFORMANCE CORE LAYER

Ensures excellent durability, stability and long term performance.

5. BACKING LAYER

Engineered balance layer provides stability and durability of the product.

FORTIFIED FOUNDATIONS

2.5MM Product Specs

The information shown here is only a partial listing of the full product information. Visit our website for the complete and most up-to-date specifications of each product.

Short-Term/Residual Indentation

Heat Stability by Color Change (ASTM F1514)

Static Coefficient of Friction (ASTM D2047)

Dimensional Stability (ASTM F2199)

Resistance to Chemicals (ASTM F925)

15 Year Limited Commercial Wear Warranty

Static Load Limit (ASTM F970)

(ASTMF1914-07)

Flexibility (ASTM F137)

Light Stability (ASTM F1515)

Pass

Pass

Warranty

FLEXFORM

Tile Size

12" x 24"

18" x 18"

18" x 36"

5" x 48"

7" x 48"

9" x 48"

Construction

High Performance Luxury Vinyl Tile

Finish

ProGuard™ Polyurethane Coating

Wear Layer Thickness

22 mil (0.55 mm)

Overall Thickness

2.5mm (0.098")

Edge Profile

Micro Bevel


Critical Radiant Flux (ASTM E648)

Pass - Class 1


Smoke Density (ASTM E662)

Pass


Recommended Installation Methods







Random



Herringbone

(Recommended for 12" x 24" and 18" x 36" only)

SHADE VARIATION GUIDE







Just as texture and physical appearance will vary in samples of wood, beautiful variations of shade are found in this unique LVT product. The shade variation guide reflects our LVT styles ranging from low, to moderate, to high. Low shade variation features soft and subtle gradations. Moderate shade variation contains a more distinguishable variety of hue. And high shade variation models the highest level of contrast. The patterns in **FORTIFIED FOUNDATIONS** have **varying** shade variation as noted throughout the brochure.

16



FORTIFIED FOUNDATIONS

2.5 MM

FLEX*FORM*™ LVT

SUSTAINABLE FEATURES

Milliken LVT is durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% phthalate free. All production waste is granulated and recycled into backing production to create an internal closed loop recycling process. Milliken LVT is manufactured at facilities that are ISO 9001 compliant.

Milliken LVT meets many environmental standards, including FloorScore® certified, Prop 65 Free and Phthalate Free, Certified EPD, and Declare.







Declare.

Images in this brochure are approximate for color and pattern scale. Please use actual samples to make your final selections.

SHOWN ON THE COVER (Front) Rosecliff Cherry RSC206. Vertical Ashlar. (Back) Stone in STN120 and STN108. Vertical Ashlar.