




**MAJOR
FREQUENCY: ONE**

Milliken[™]

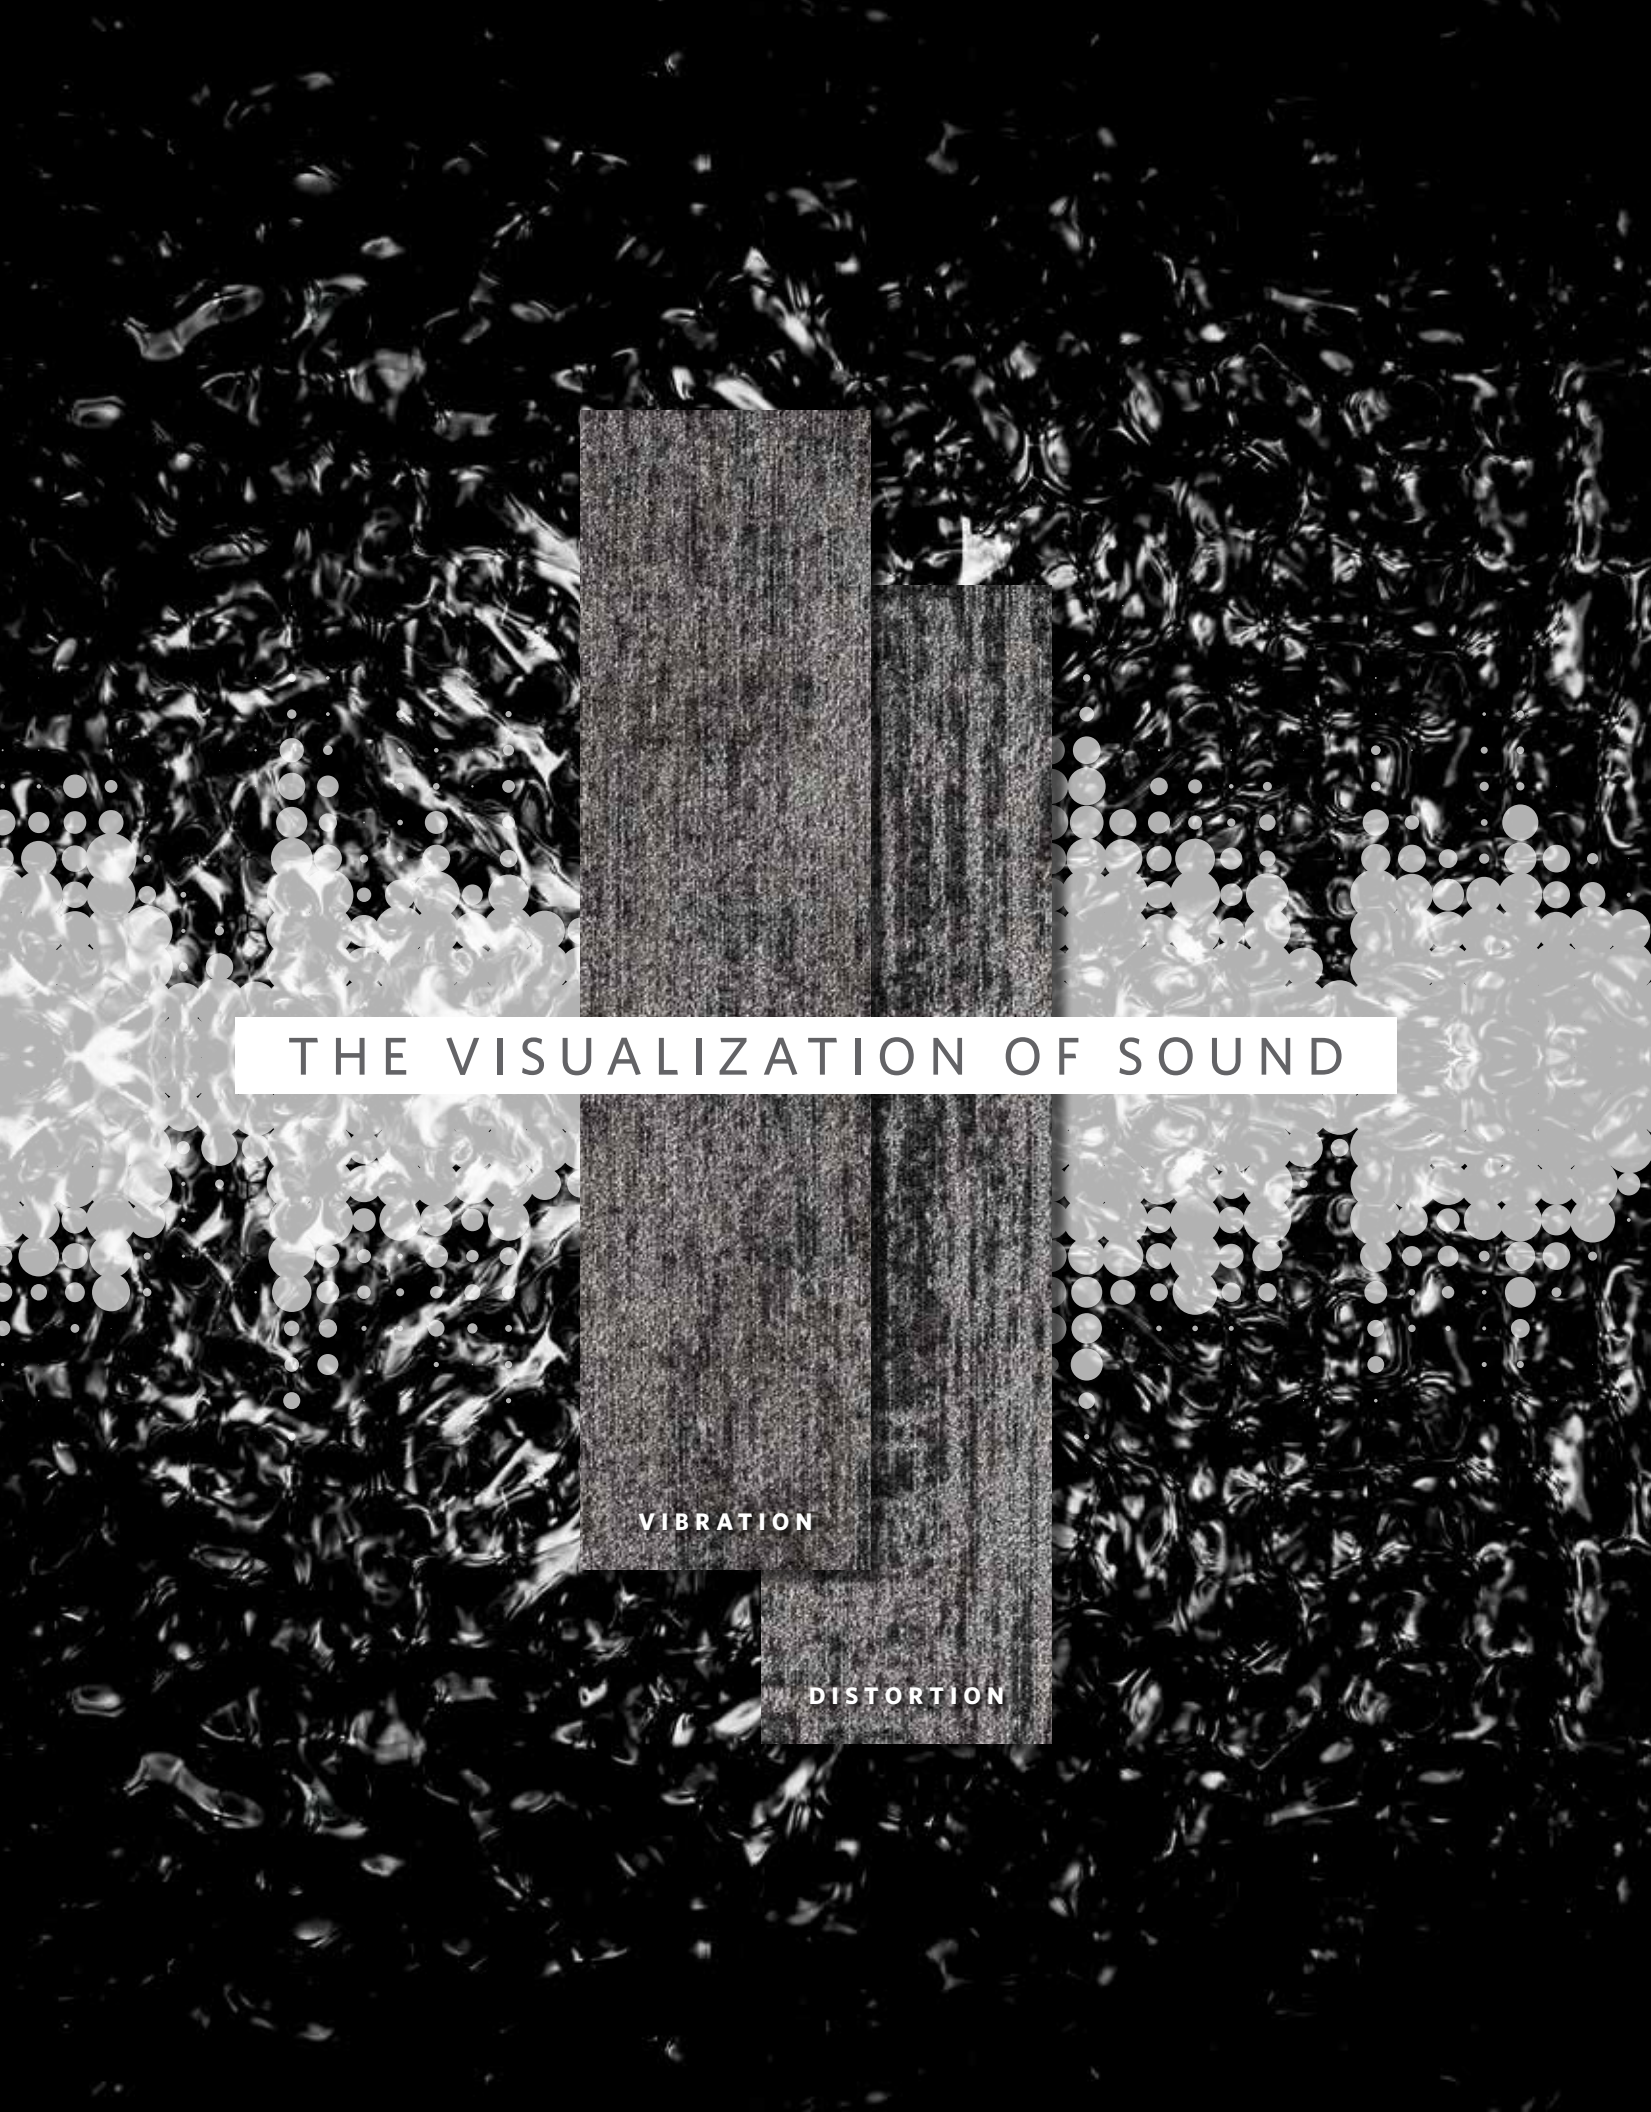

THE VISUALIZATION OF SOUND

VIBRATION

DISTORTION



Distortion in Tremor DTN209-118. 25cm x 1m planks. Vertical ashlar.

Sound can beckon to the core of our emotions. What begins as a singular wave can multiply and curiously sync together, eventually inciting a poignant experience within each of us.

Introducing Major Frequency: One, the first wave in a series of inspiration rooted in the realization of sound's power. Through two organic patterns expressed in 17 unhindered color options, this collection explores the possibilities that exist within raw and unencumbered cymatics.

MAJOR FREQUENCY: ONE

VIBRATION


Stippled and robust, Vibration harnesses a finer, more saturated vitality.



DISTORTION

A second perspective, Distortion expresses a slightly larger, yet more diluted flow within positive and negative space.



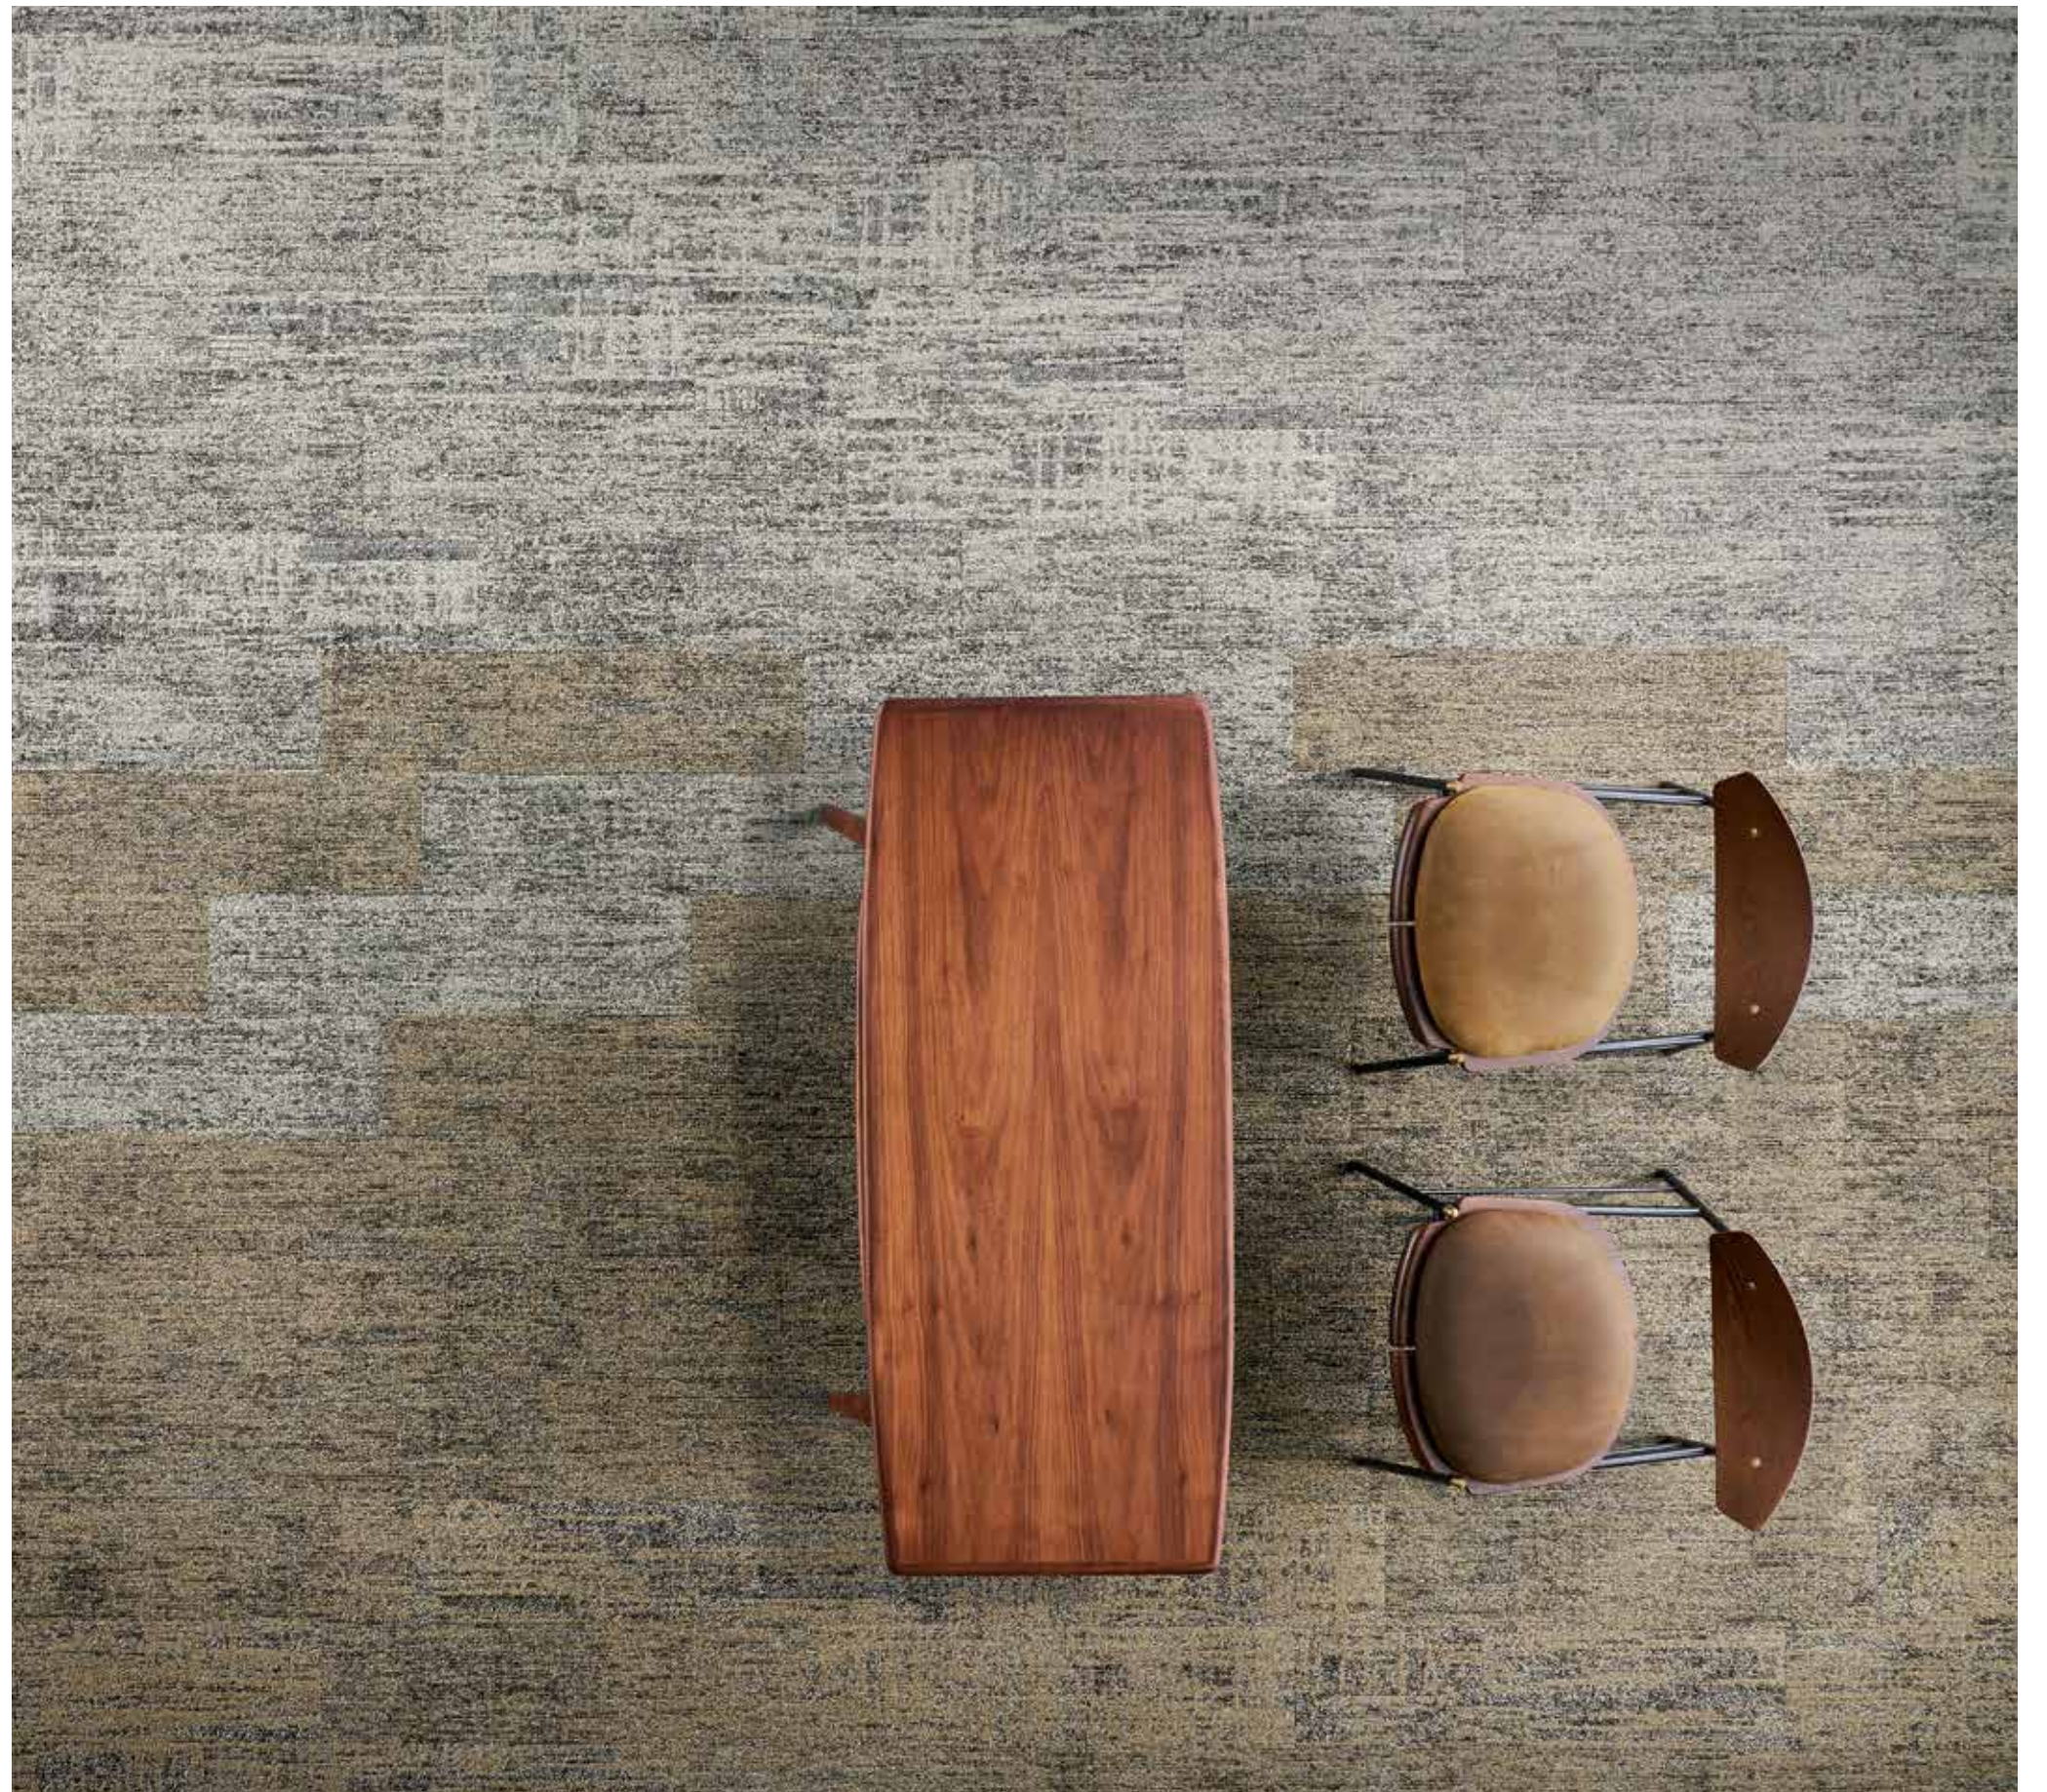





(Left to right) Distortion in Tremor DTN209-118. Vibration in Tremor VBN209-118. Vibration in Rustle VBN141-79-209. Distortion in Rustle DTN141-79-209. 25cm x 1m planks. Vertical ashlar.




FIND THE HUE THAT MOVES YOU.
Visualize now at MillikenFloors.com


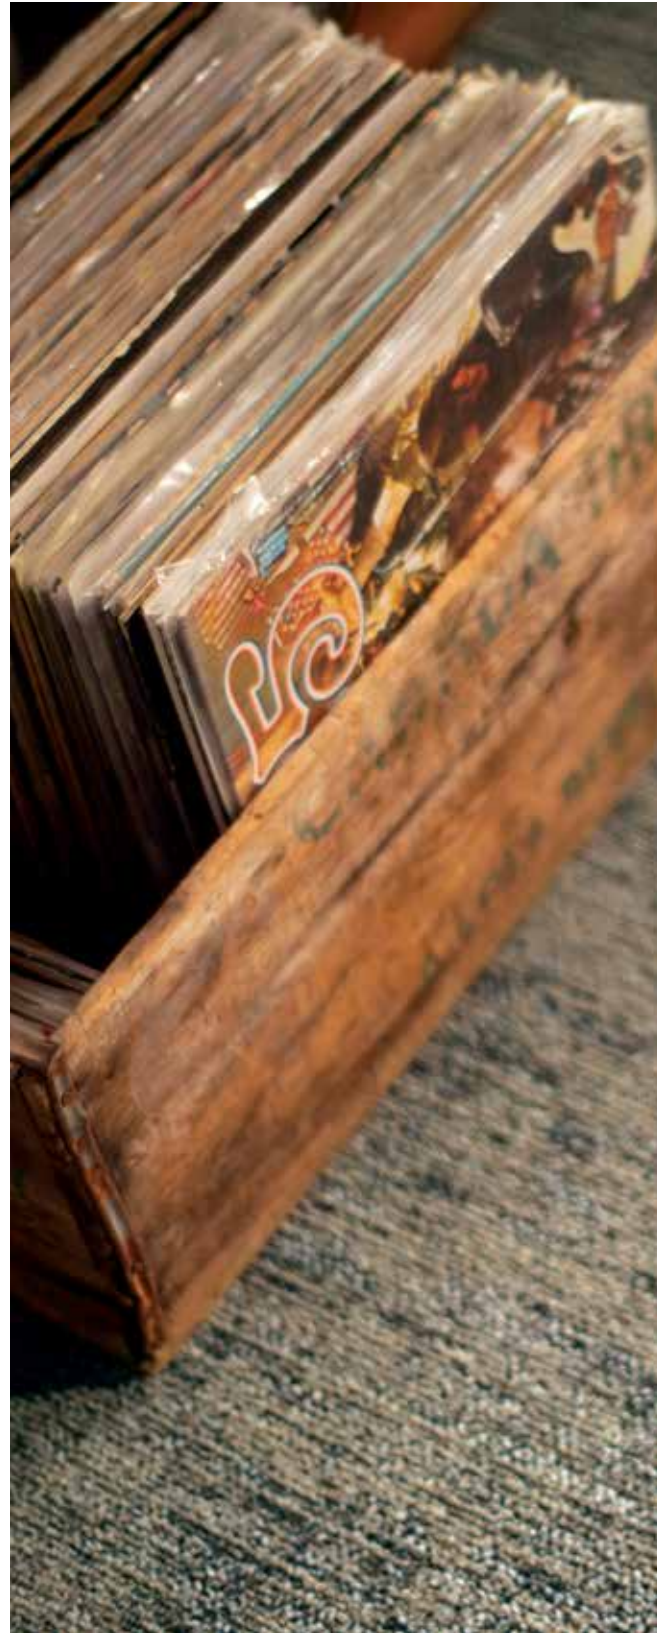


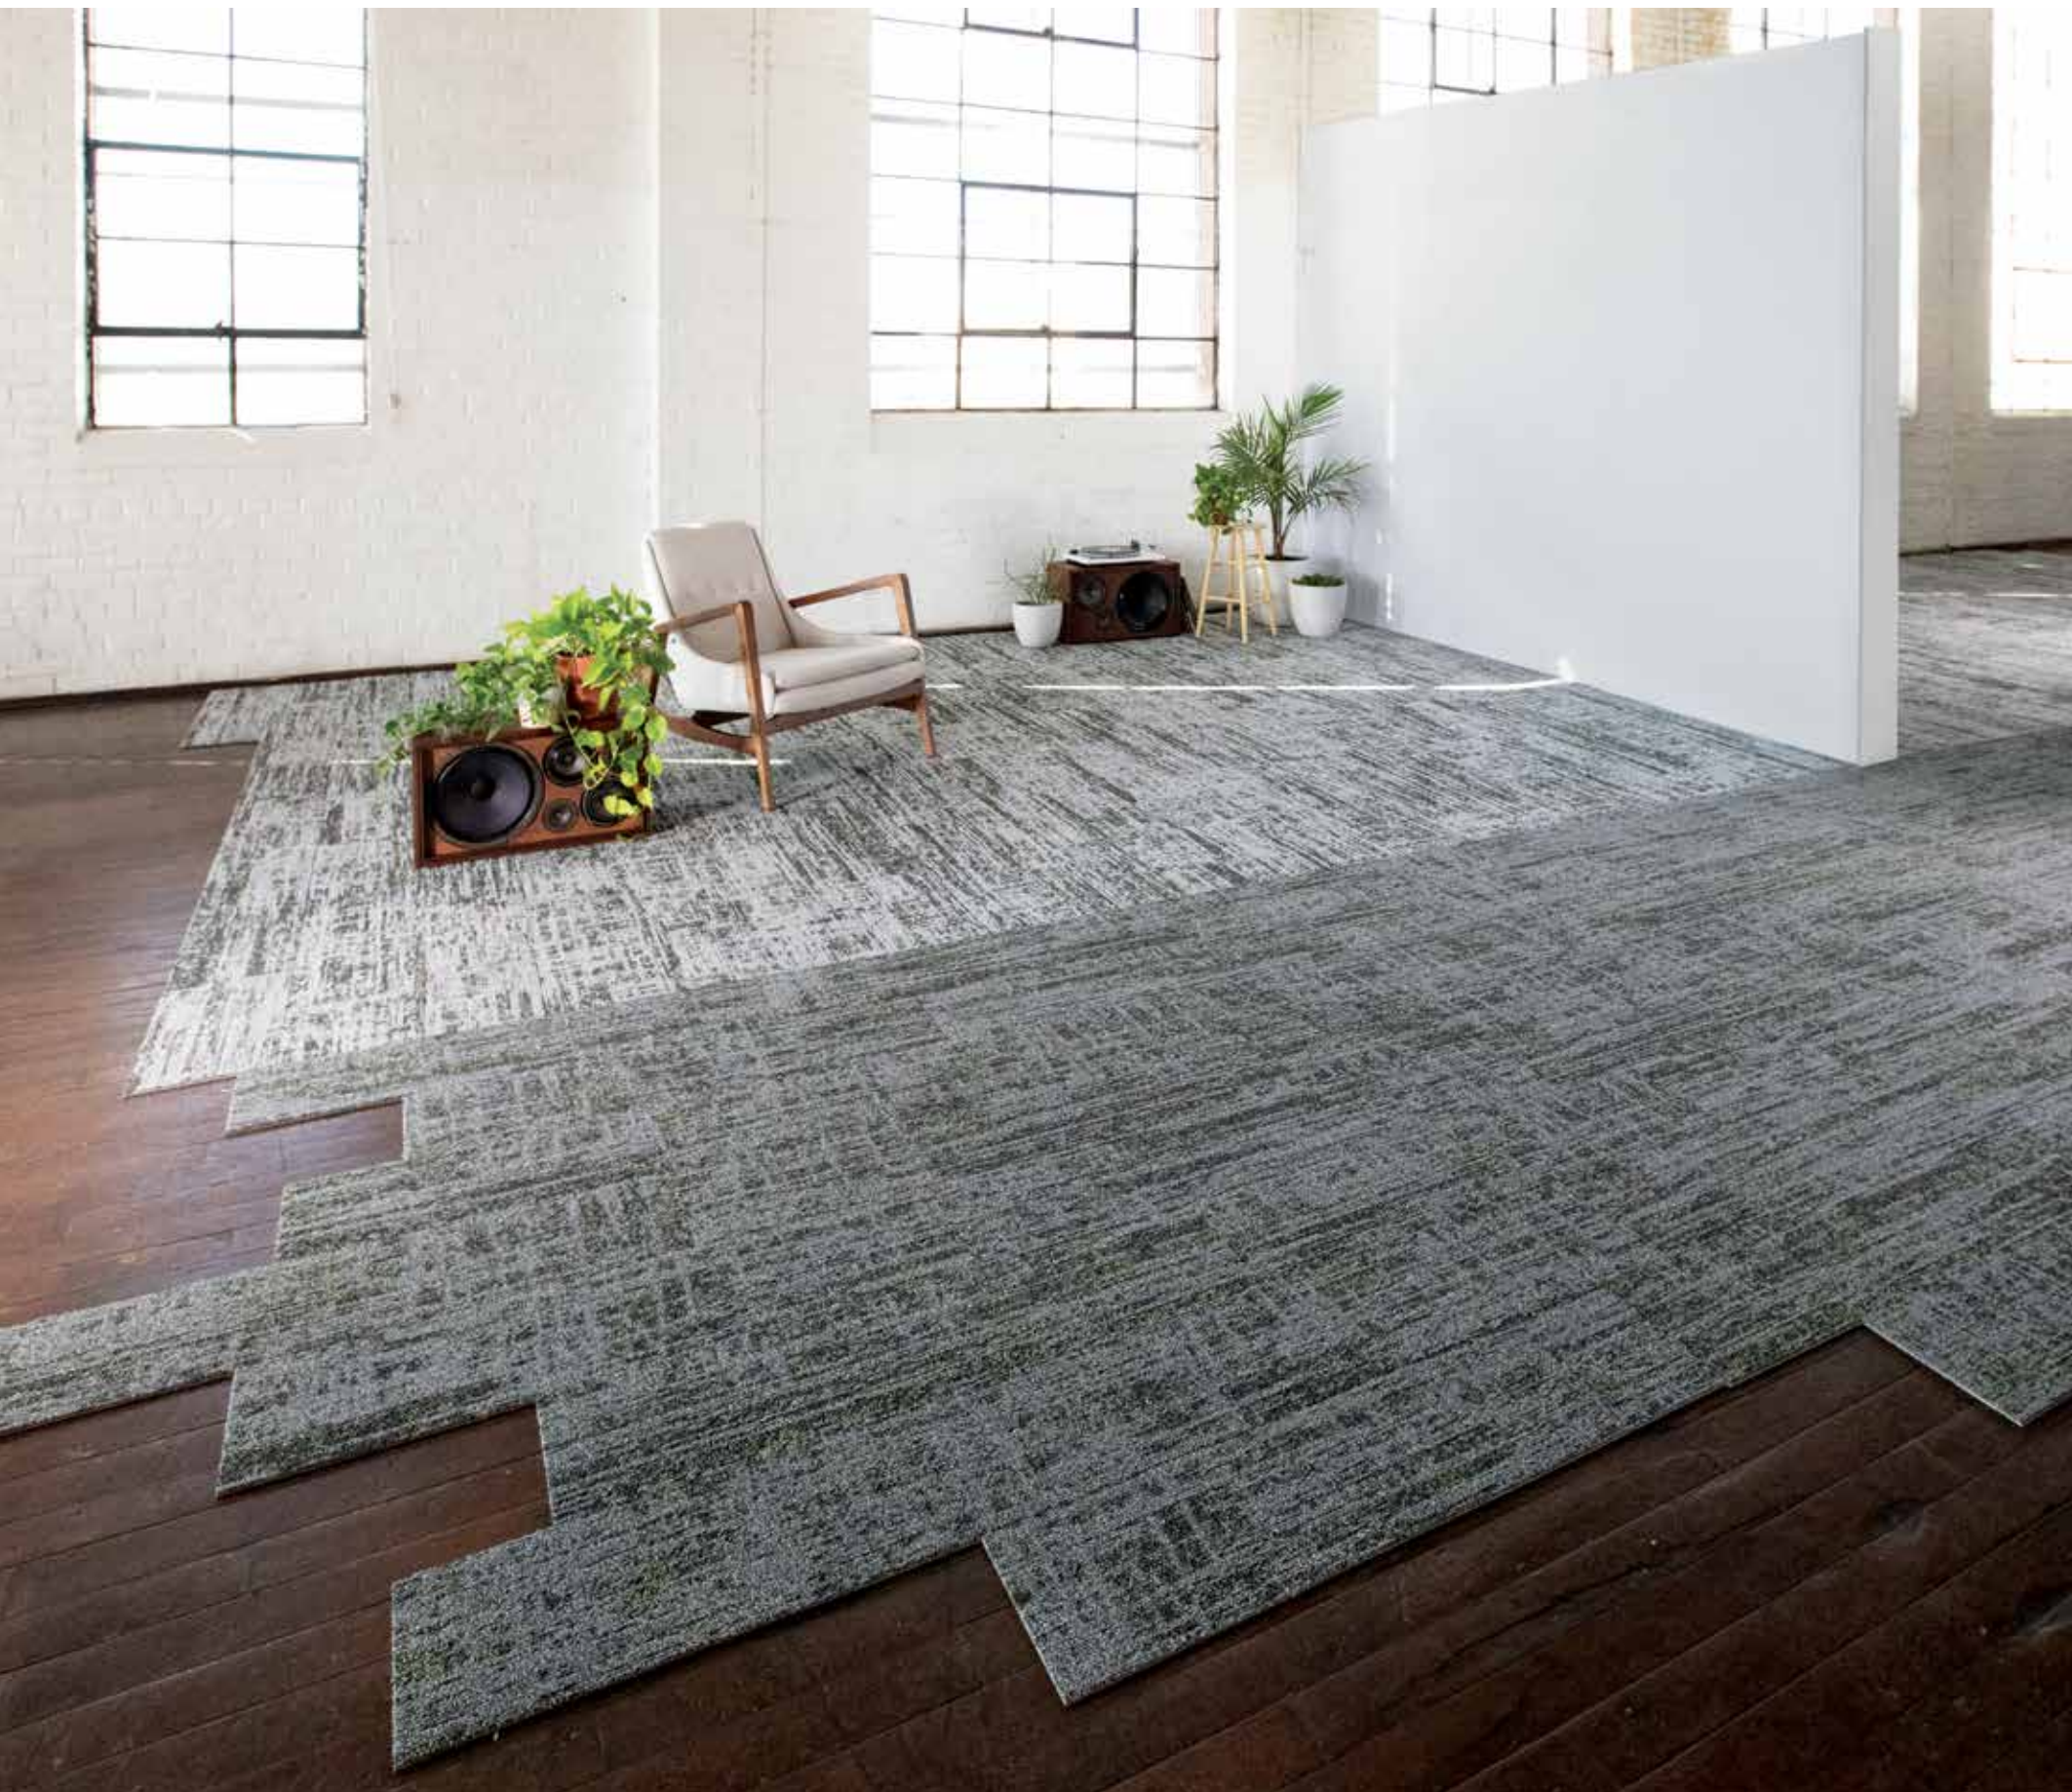



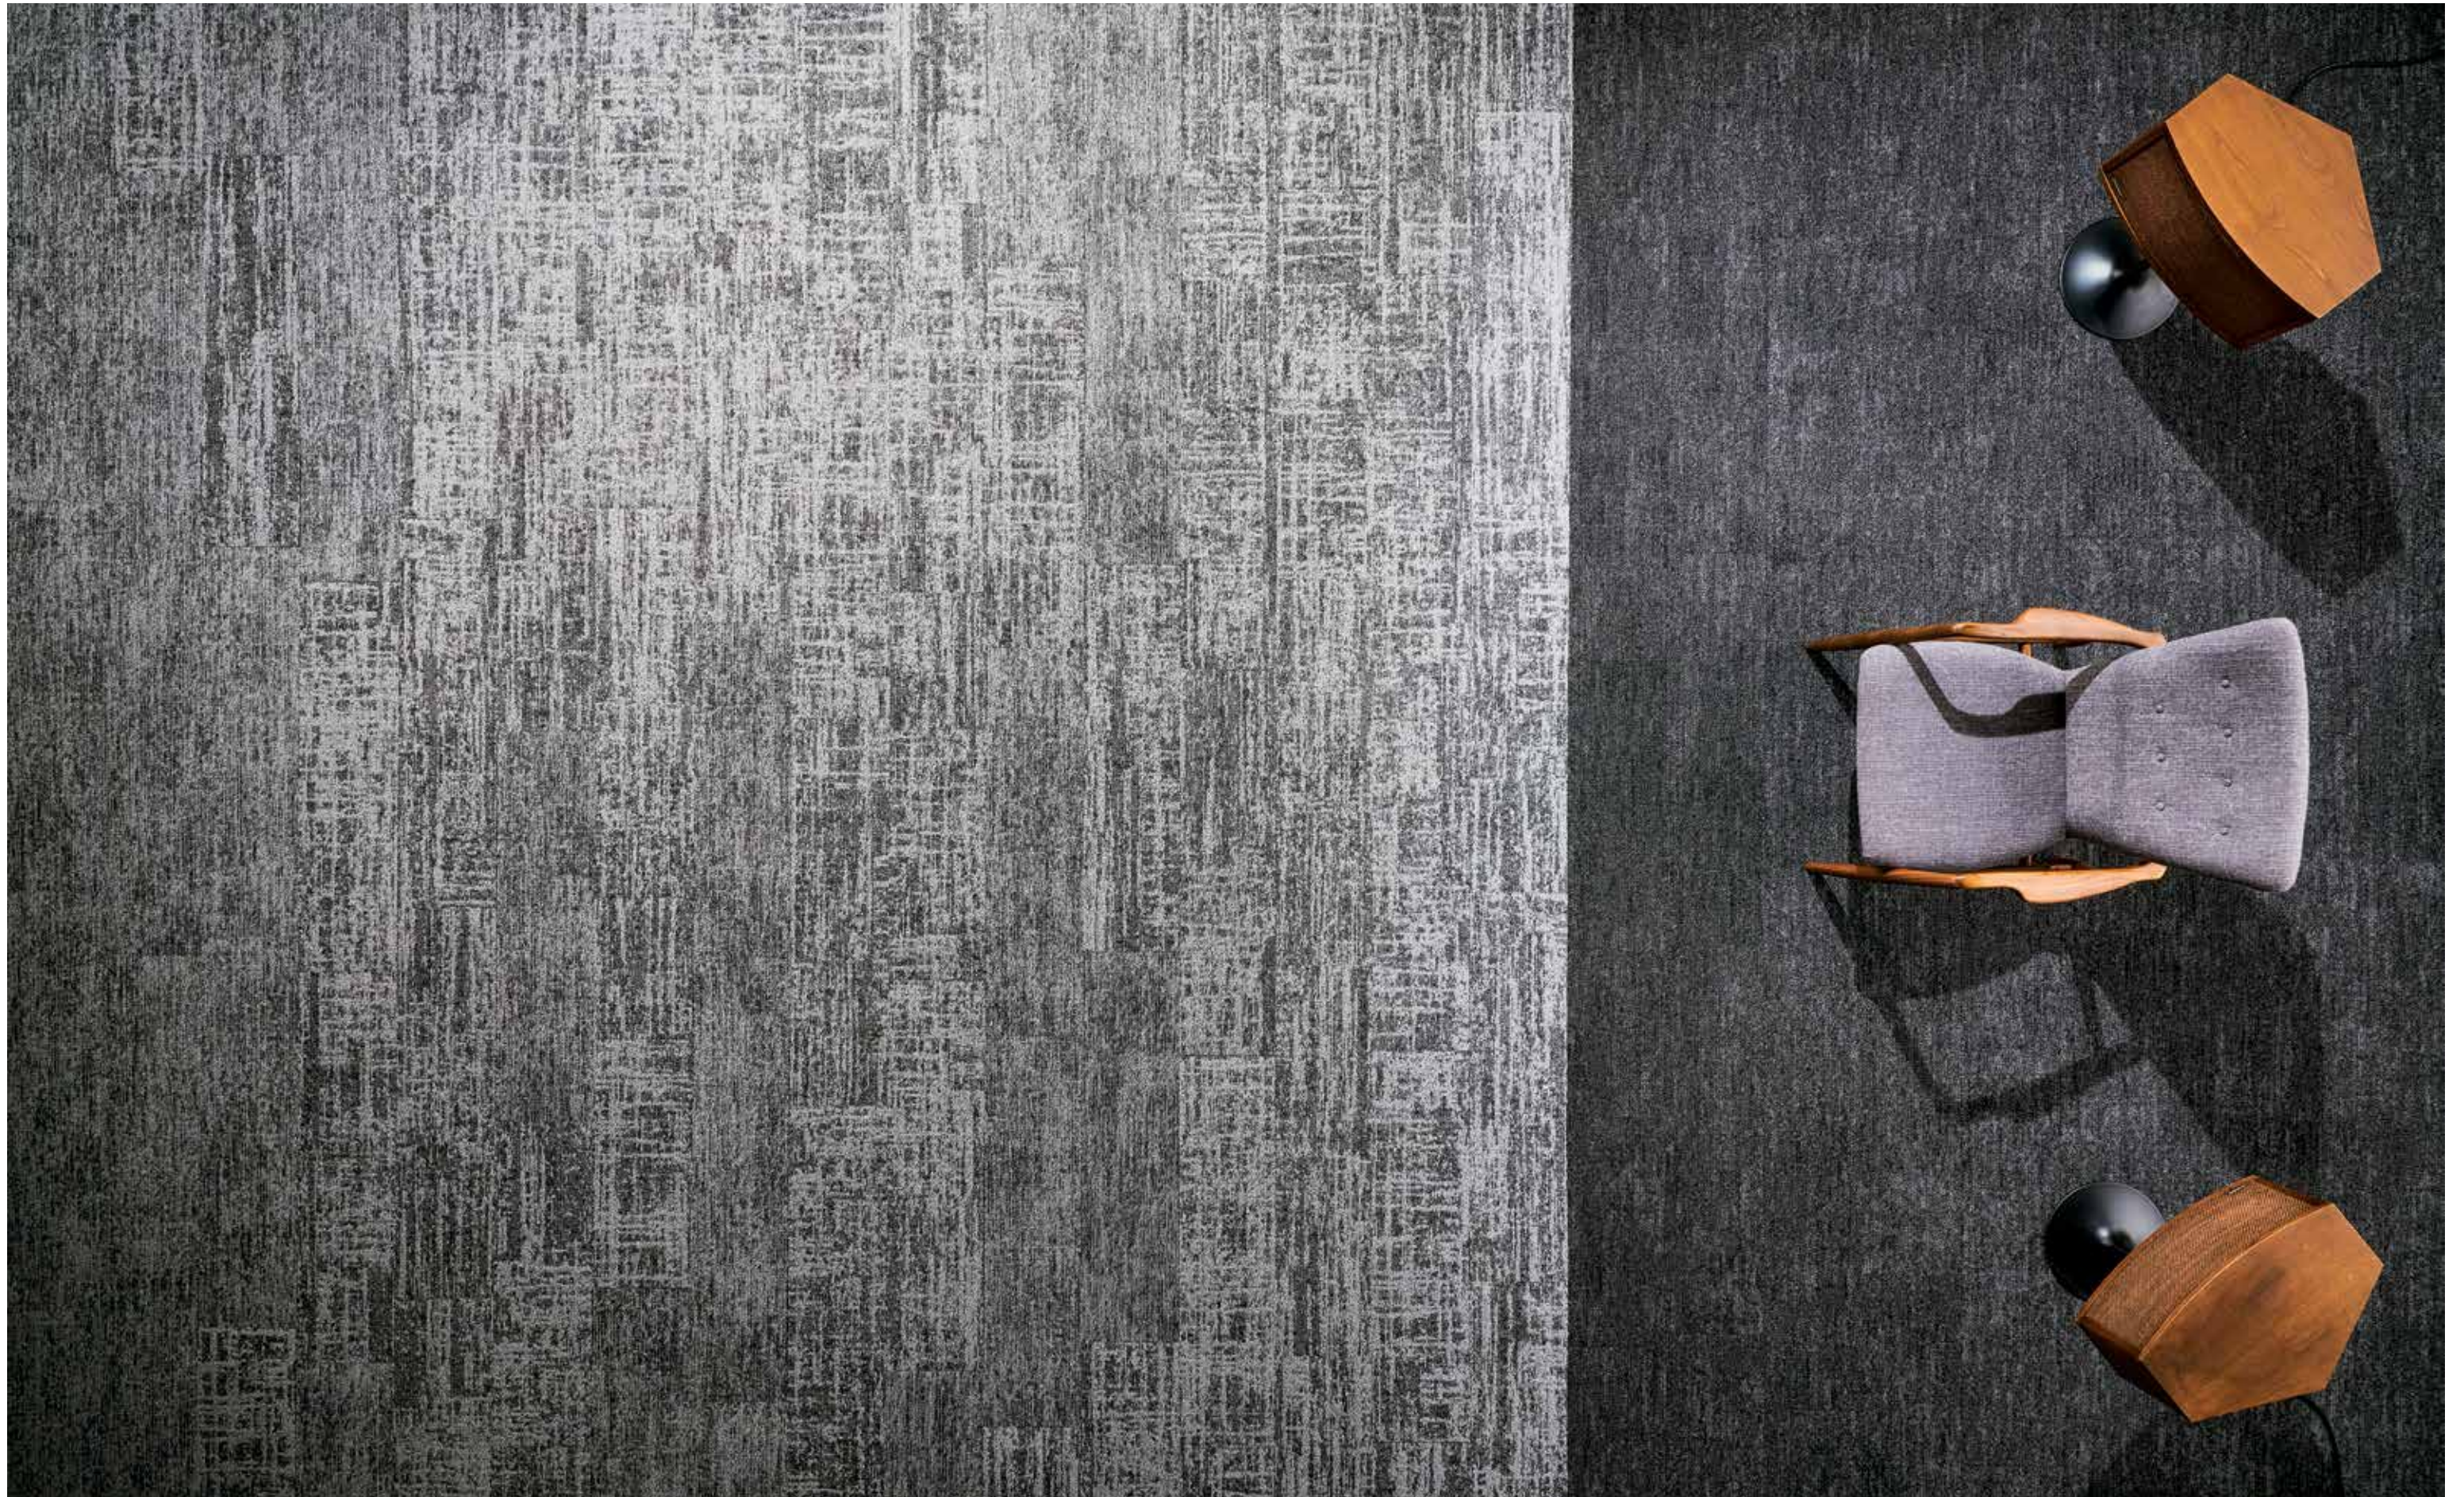



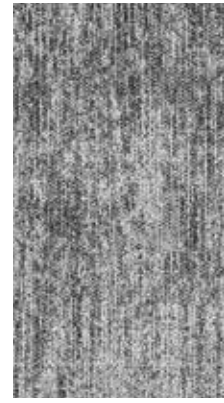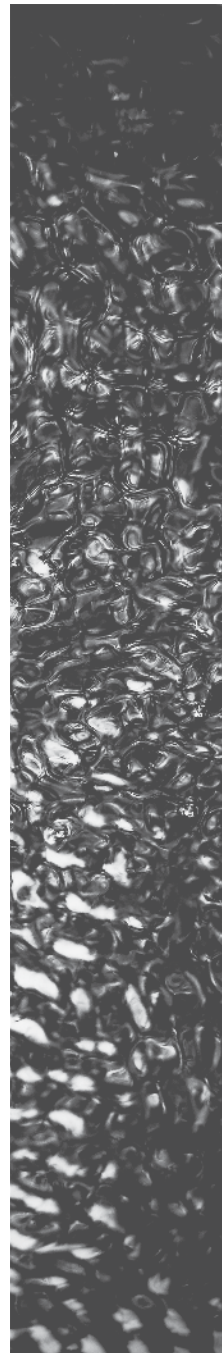

VBN209-118
TREMOR




VBN94-27-217
BUZZ



VBN218-106
PERCEIVE



VBN94-211-212
CRESCENDO

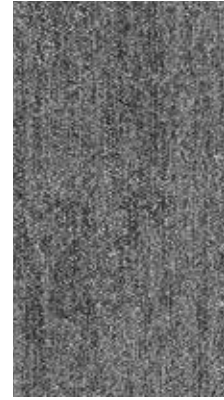

VBN79-152
STRIDENT



VBN141-118-106
QUAKE




VBN211-106
WAVER



VBN211-27-217
OVERTONE



VBN183-118-152
INTERFERENCE

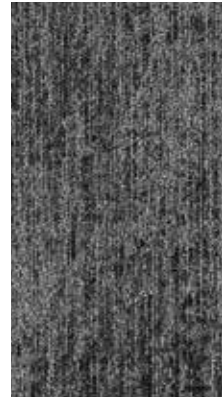

VBN27-152
FLUX



VBN27-67
DISRUPT



VBN190-79-152
CLAMOR



VBN141-79-209
RUSTLE



VBN183-27-118
ROUSE





VBN27-118
STATIC



VBN212-27
TRILL



VBN60-79-27
RUCKUS

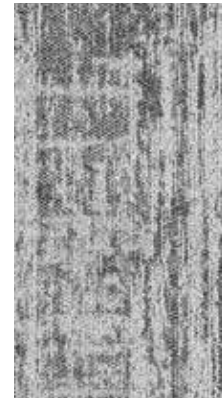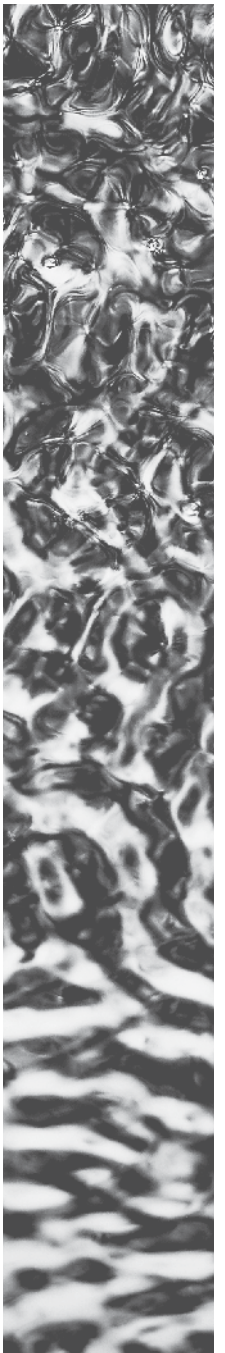

DTN209-118
TREMOR



DTN94-27-217
BUZZ



DTN218-106
PERCEIVE



DTN94-211-212
CRESCENDO



DTN79-152
STRIDENT



DTN141-118-106
QUAKE




DTN211-106
WAVER



DTN211-27-217
OVERTONE



DTN183-118-152
INTERFERENCE

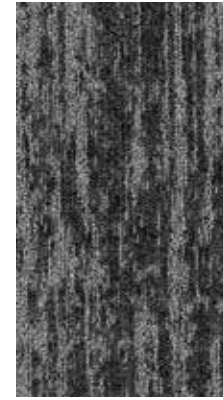

DTN27-152
FLUX



DTN27-67
DISRUPT



DTN190-79-152
CLAMOR



DTN183-27-118
ROUSE



DTN27-118
STATIC



DTN212-27
TRILL




DTN60-79-27
RUCKUS



DTN141-79-209
RUSTLE

STYLE BACKED BY PERFORMANCE

Milliken Floor Covering offers products and expertise in all areas of your commercial spaces, including high-performance entryway systems, modular and broadloom carpet, and resilient flooring. Simplify your flooring projects by working with a trusted partner that lets you focus on enjoying the process of creating a great space.

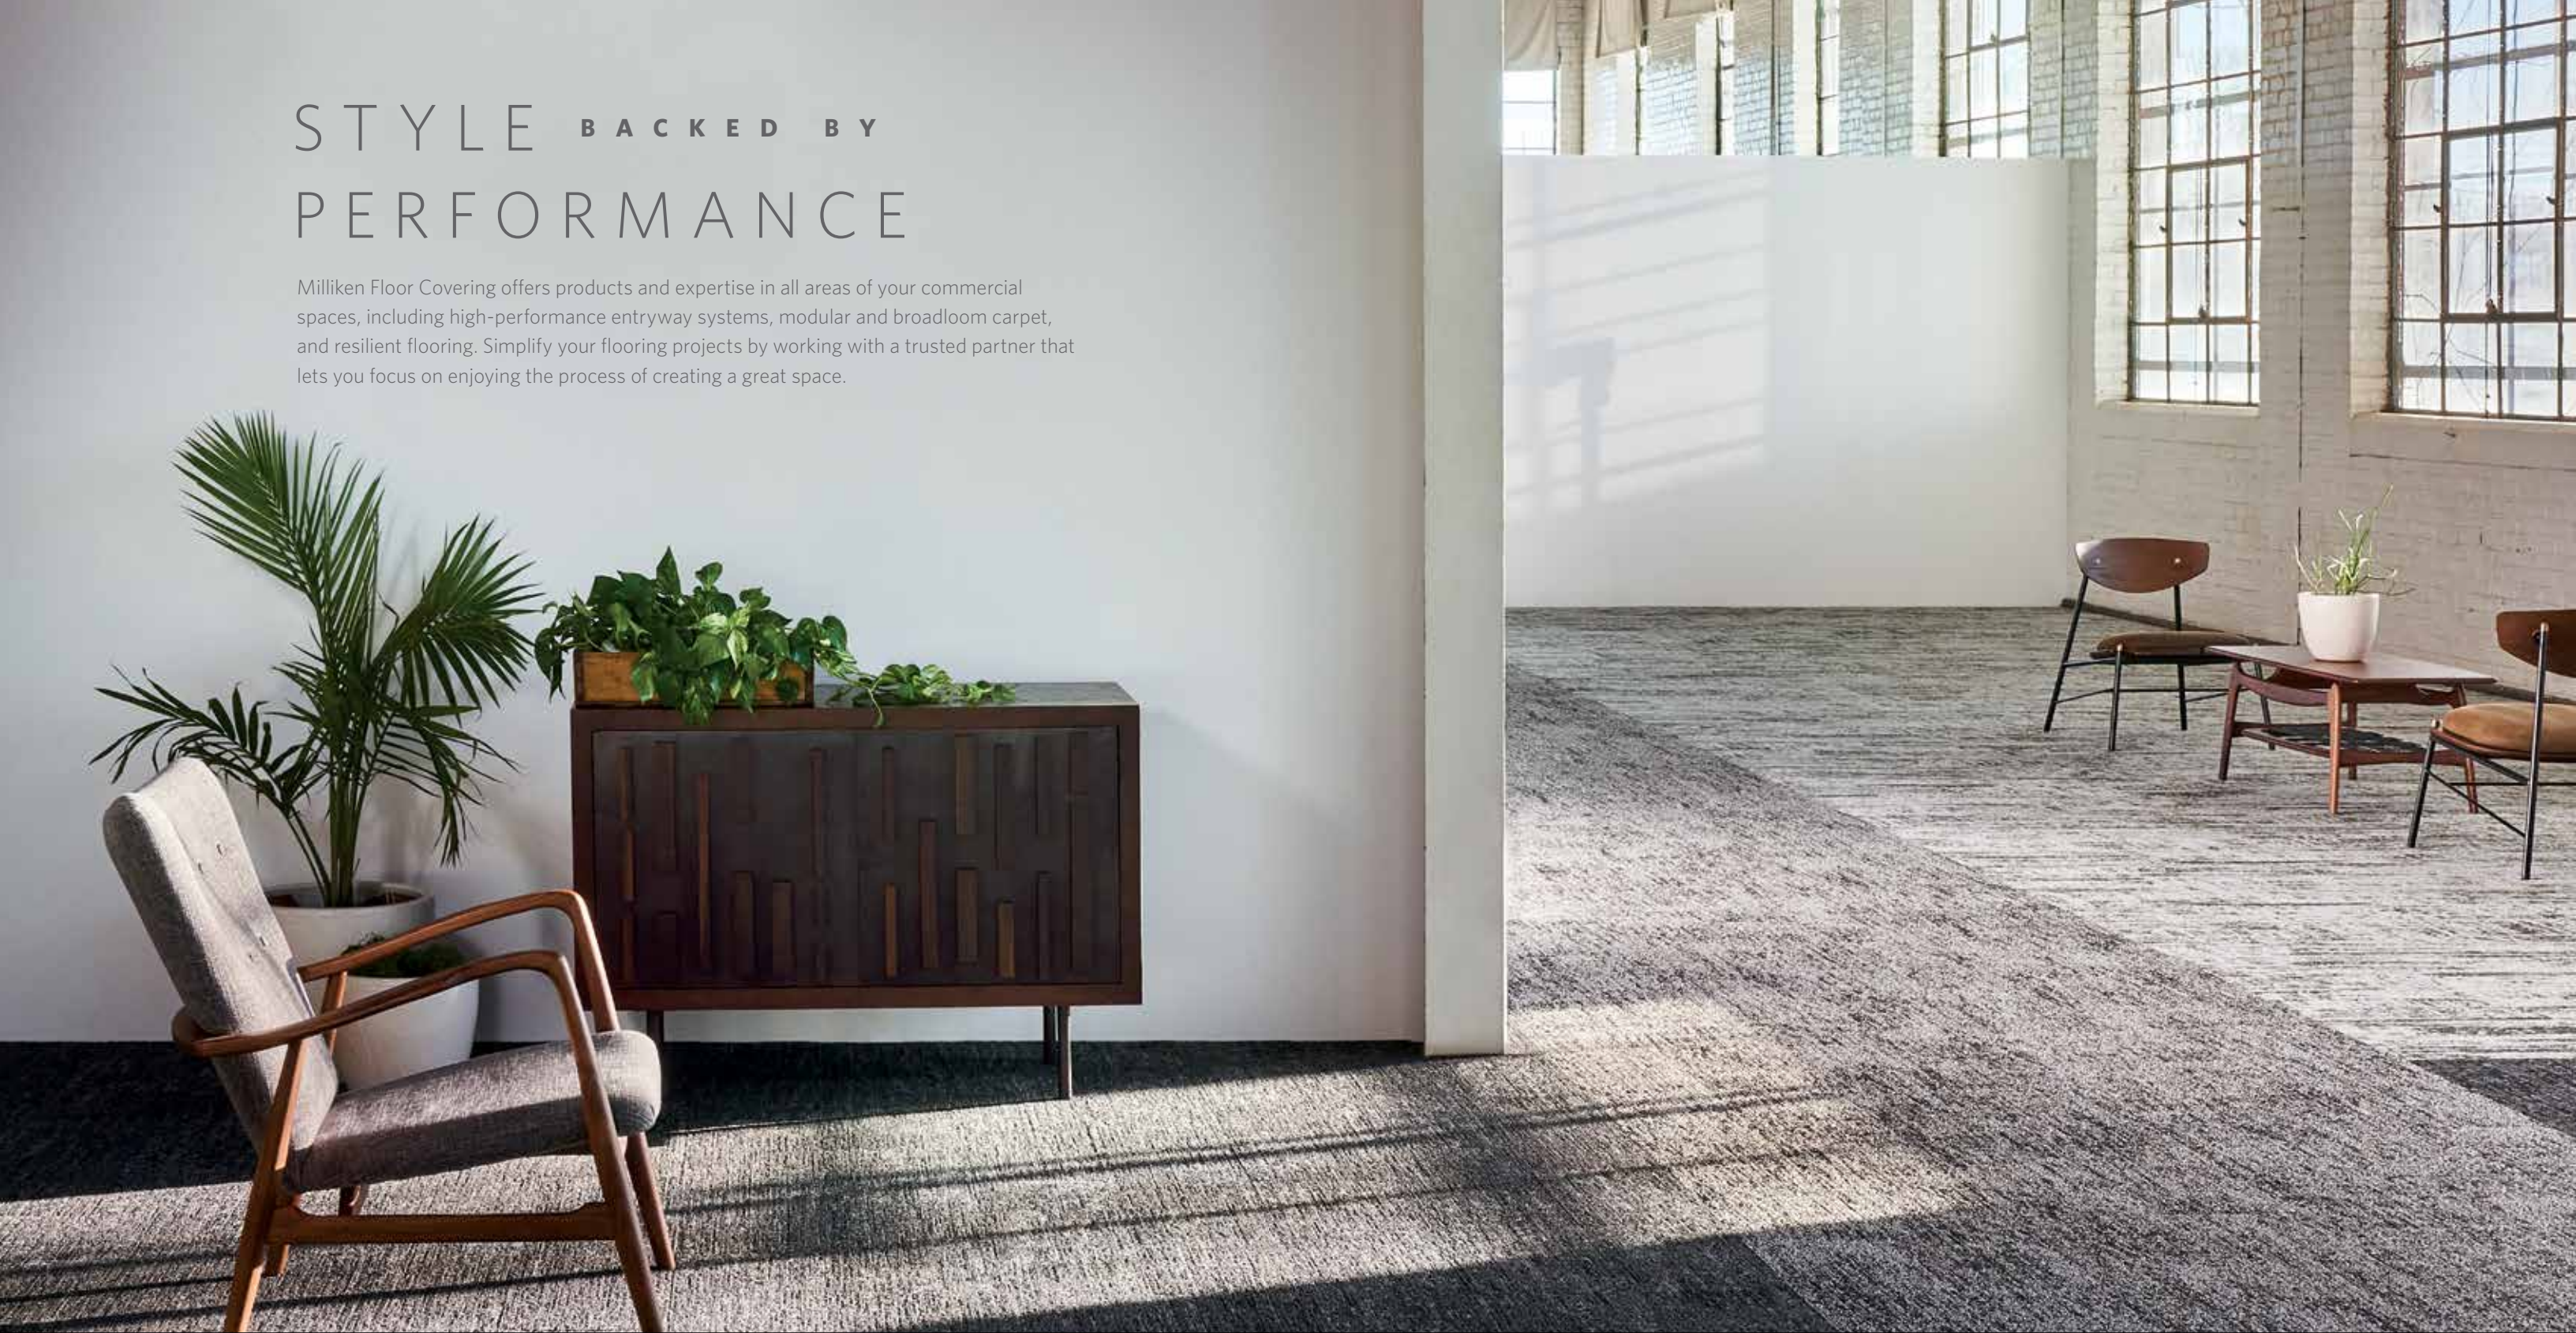

WARRANTY

Our products are backed by lifetime commercial warranties that ensure quality and give peace of mind.



SUSTAINABILITY

Milliken carpet, LVT, and entrance flooring tiles are carbon neutral everywhere in the world. As part of our M/PACT™ carbon neutral program, great care is taken when selecting materials, our carpet materials are Red List Free and PVC Free.



MOISTURE MANAGEMENT

Milliken modular carpet is a moisture mitigation solution all by itself. Our carpet's WellBAC® open-cell backing allows the floor to breathe and moisture to evaporate, unlike hardback products.



STAINSMART®

StainSmart provides lifetime resistance for your carpet against penetrating stains and soil.



WELLBAC® CUSHION

WellBAC® cushion provides superior underfoot comfort while improving the carpet's durability and offering ergonomic, acoustic and environmental benefits.



TRACTIONBACK®

Our bio-based, high-friction coating keeps carpet tiles securely in-place without additional adhesives, eliminating the need to prime or seal the floor, thereby reducing installation time and costs.



MAJOR FREQUENCY: ONE

Vibration/Distortion

Construction

Tufted, Textured Loop

Tile Size

25 cm x 1 m (9.84" x 39.4")

Yarn Type

Universal Fibers® Solution-Dyed Nylon

Stain Resist / Soil Release

StainSmart®

Finished Pile Height

Distortion: 0.14" (3.56 mm)

Vibration: 0.13" (3.30 mm)

Finished Pile Thickness

Distortion: 0.083" (2.11 mm)

Vibration: 0.078" (1.98 mm)

Average Density

Distortion: 6,610

Vibration: 7,099

Standard Backing

PVC-Free WellBAC® Comfort Cushion

Available with TractionBack®

Texture Appearance Retention Rating (TARR)

Severe Traffic End-Use Applications

Recommended Installation Method(s)

All Plank Methods



ALL PLANK
METHODS

SUSTAINABLE FEATURES

Major Frequency: One is manufactured with WellBAC® Comfort cushion backing, and is certified NSF-140 Gold with over 41% pre-consumer recycled content by total product weight. **Major Frequency: One** is also available with our NSF-140 Platinum backing option. All Milliken modular carpets carry Environmental Product Declarations and Health Product Declarations, which contribute to LEED certification. Additionally, Milliken modular carpets carry Declare® transparency labels and comply with the Red List Imperative of the Living Building Challenge.™

TRACTIONBACK®

Simplify your modular installation with Milliken's patented TractionBack®, an innovative backing system that is faster, more cost efficient, and environmentally superior to wet adhesives and peel-and-stick carpet tile.



Images in this brochure and architect folder are approximate for color and pattern scale. Please use actual carpet samples to make your final selections.

Scan to explore the collection story.

SHOWN ON THE COVER

(Front) Vibration in Buzz (VBN94-27-217) and Distortion in Buzz (DTN94-27-217).

(Back) Vibration in Tremor (VBN209-118).



Milliken™