

LIVE CIRCUIT

Milliken™

# LIVE CIRCUIT

THE UNIQUE CHARGE OF OUR WORLD



**CURRENT**

A steady flow of power, continuously streaming in one individual direction.



**SURGE**

Short in duration yet permeated with energy, an unexpected course is formed.

WHEN CREATIVITY STRIKES  
*infuse your pattern with a jolt of color.*

START  
WITH  
A SOLID



INFUSE  
WITH  
A JOLT



ELECTRO



ENERGY



BOLT



MEGA





SMOLDER



SONIC



Shown at right, Surge in Ion SUR264. Surge in Ion with a jolt of Electro SUR183-264. 25cm x 1m planks. Vertical ashlar.

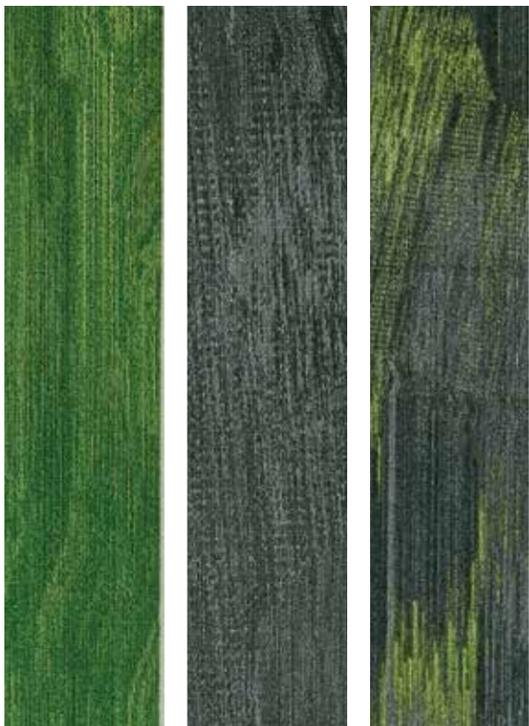


## SPARK. FLOW. SHIFT.

The fusing of an atom. The bright strike of lightning.



The static shock in our fingertips. Earth's energy can be felt all around us, flowing through natural forces and circulated to us in abundance. Boldly charged with power, this is Live Circuit.

With two divergent patterns available in 18 hue selections ranging from subtle neutrals to vivid colors, Live Circuit embodies the uniquely electric charge of our world. And, to generate even more power, select one of six color jolts to infuse your floorscape into a pivotal force.

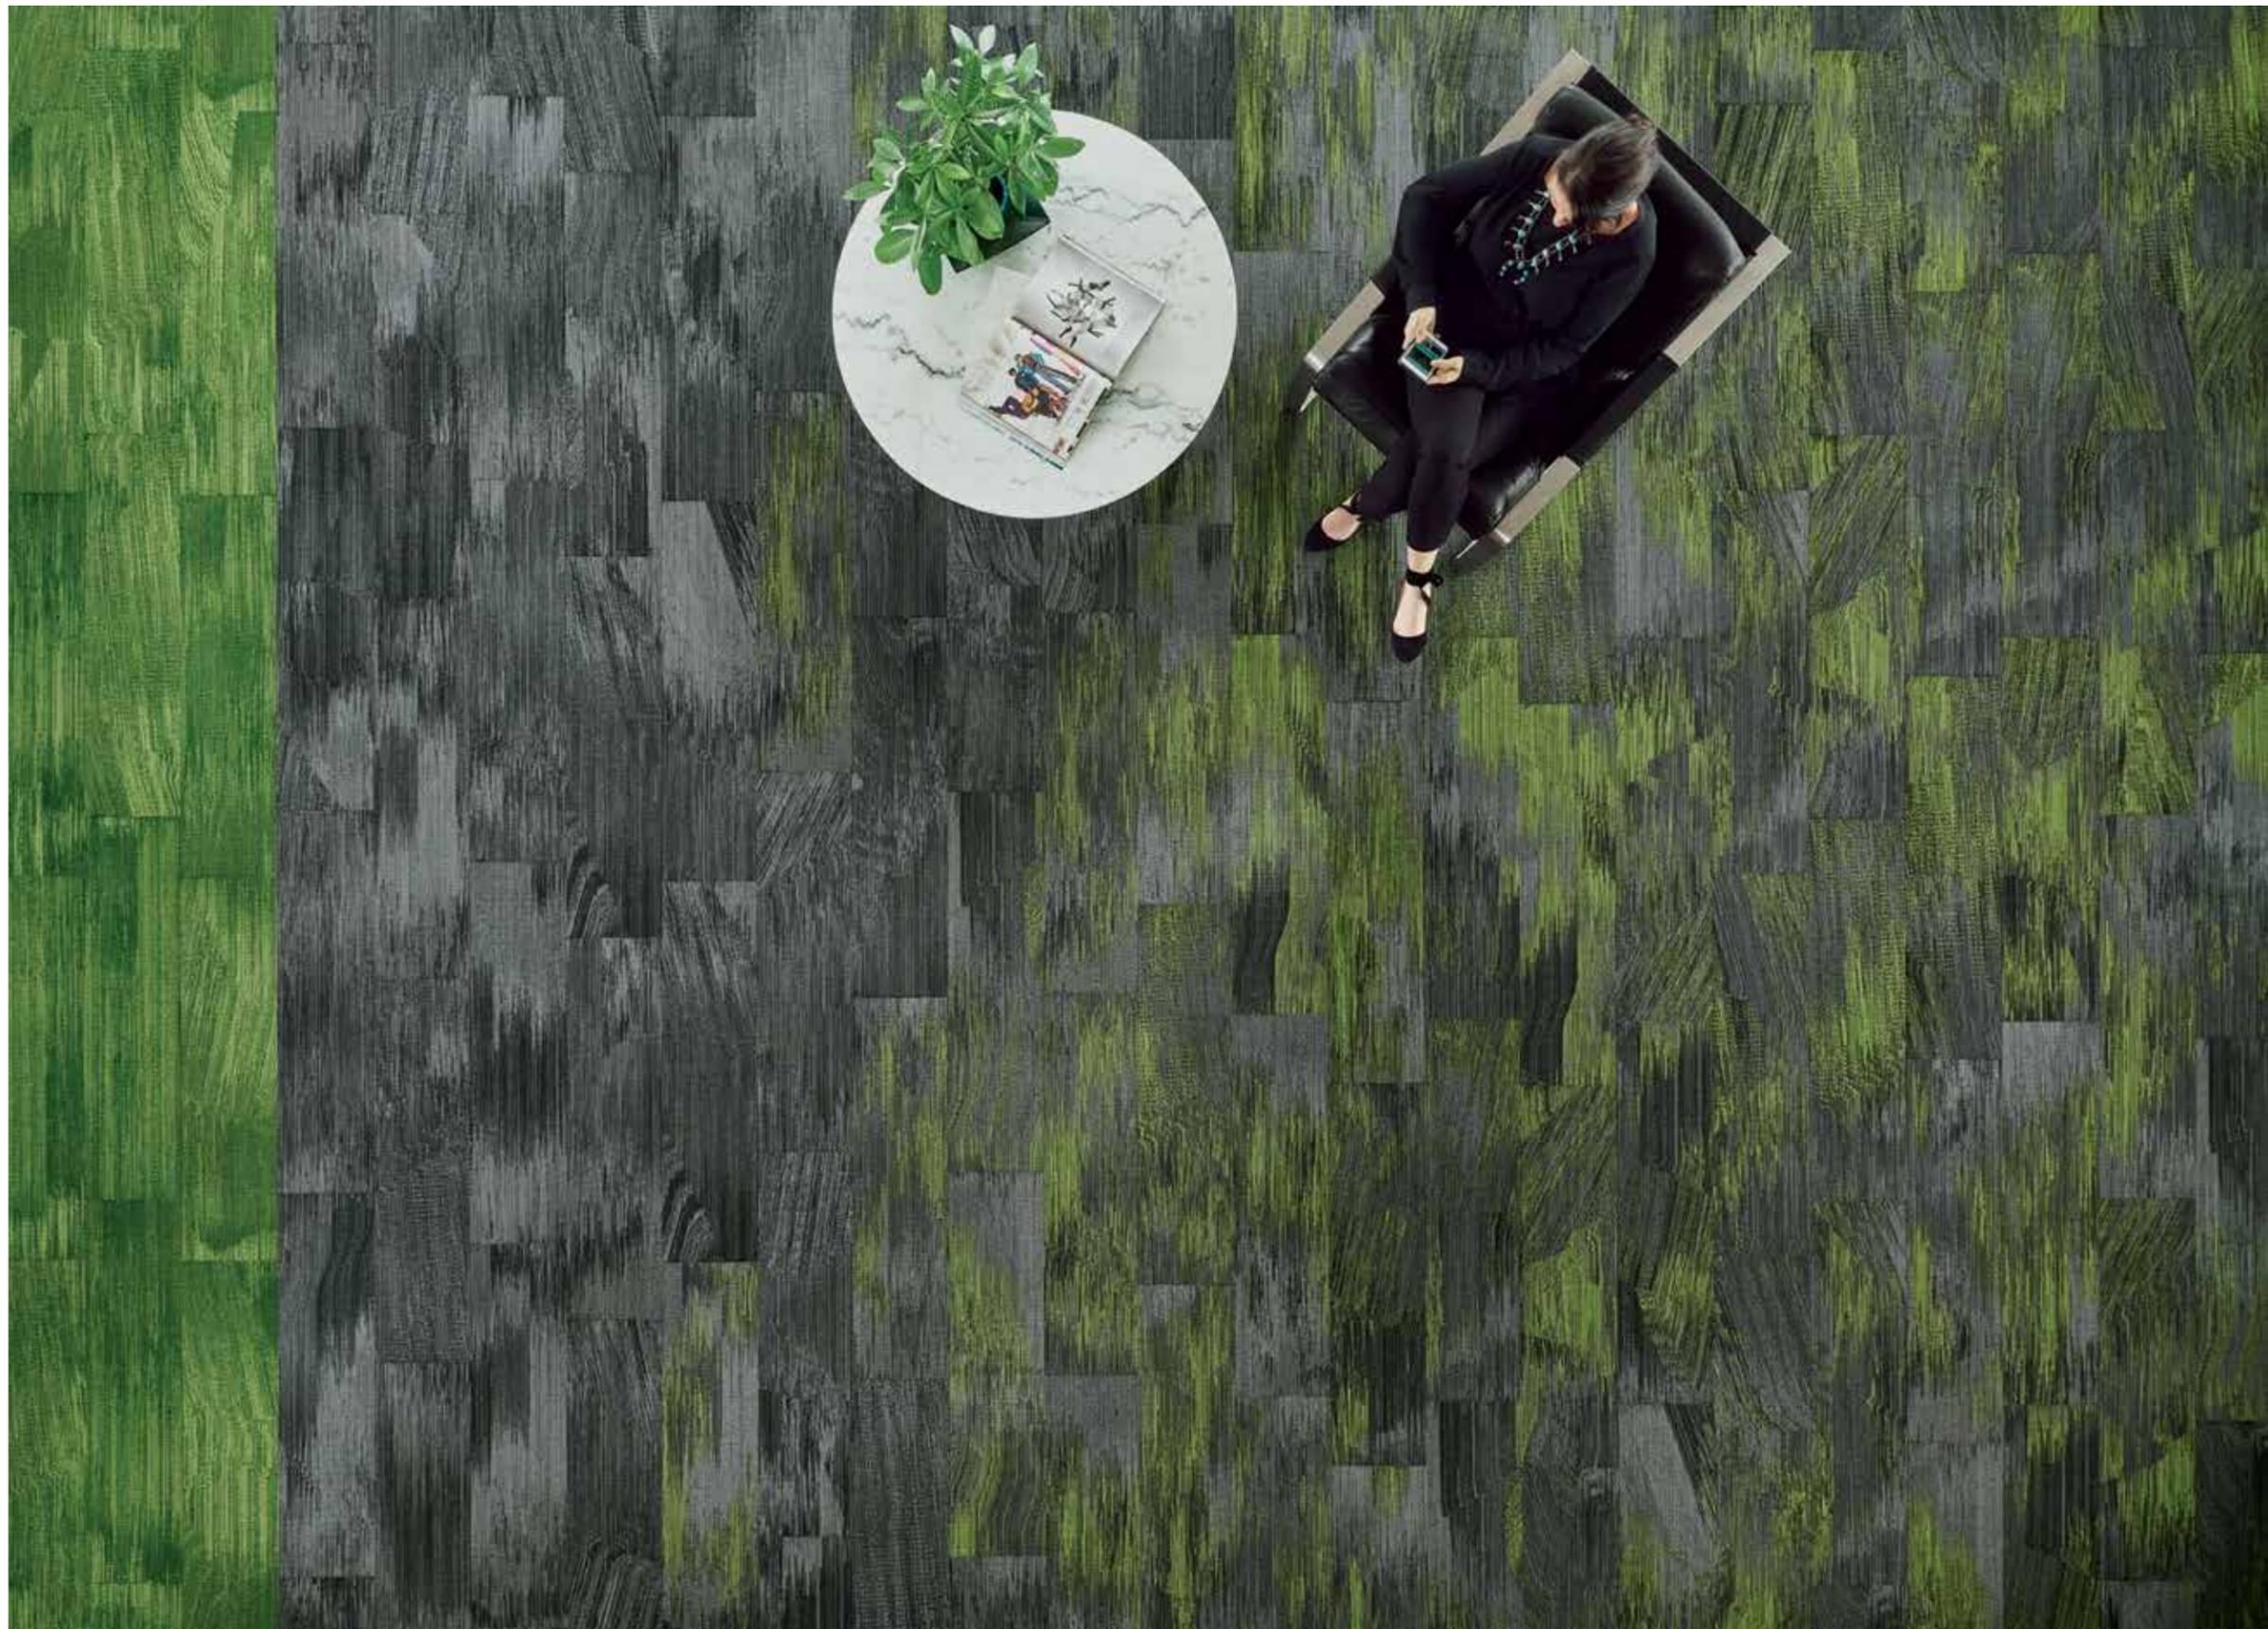




Tiles that spark your creativity. Coordinate between patterns and colors to generate your own unique charge.

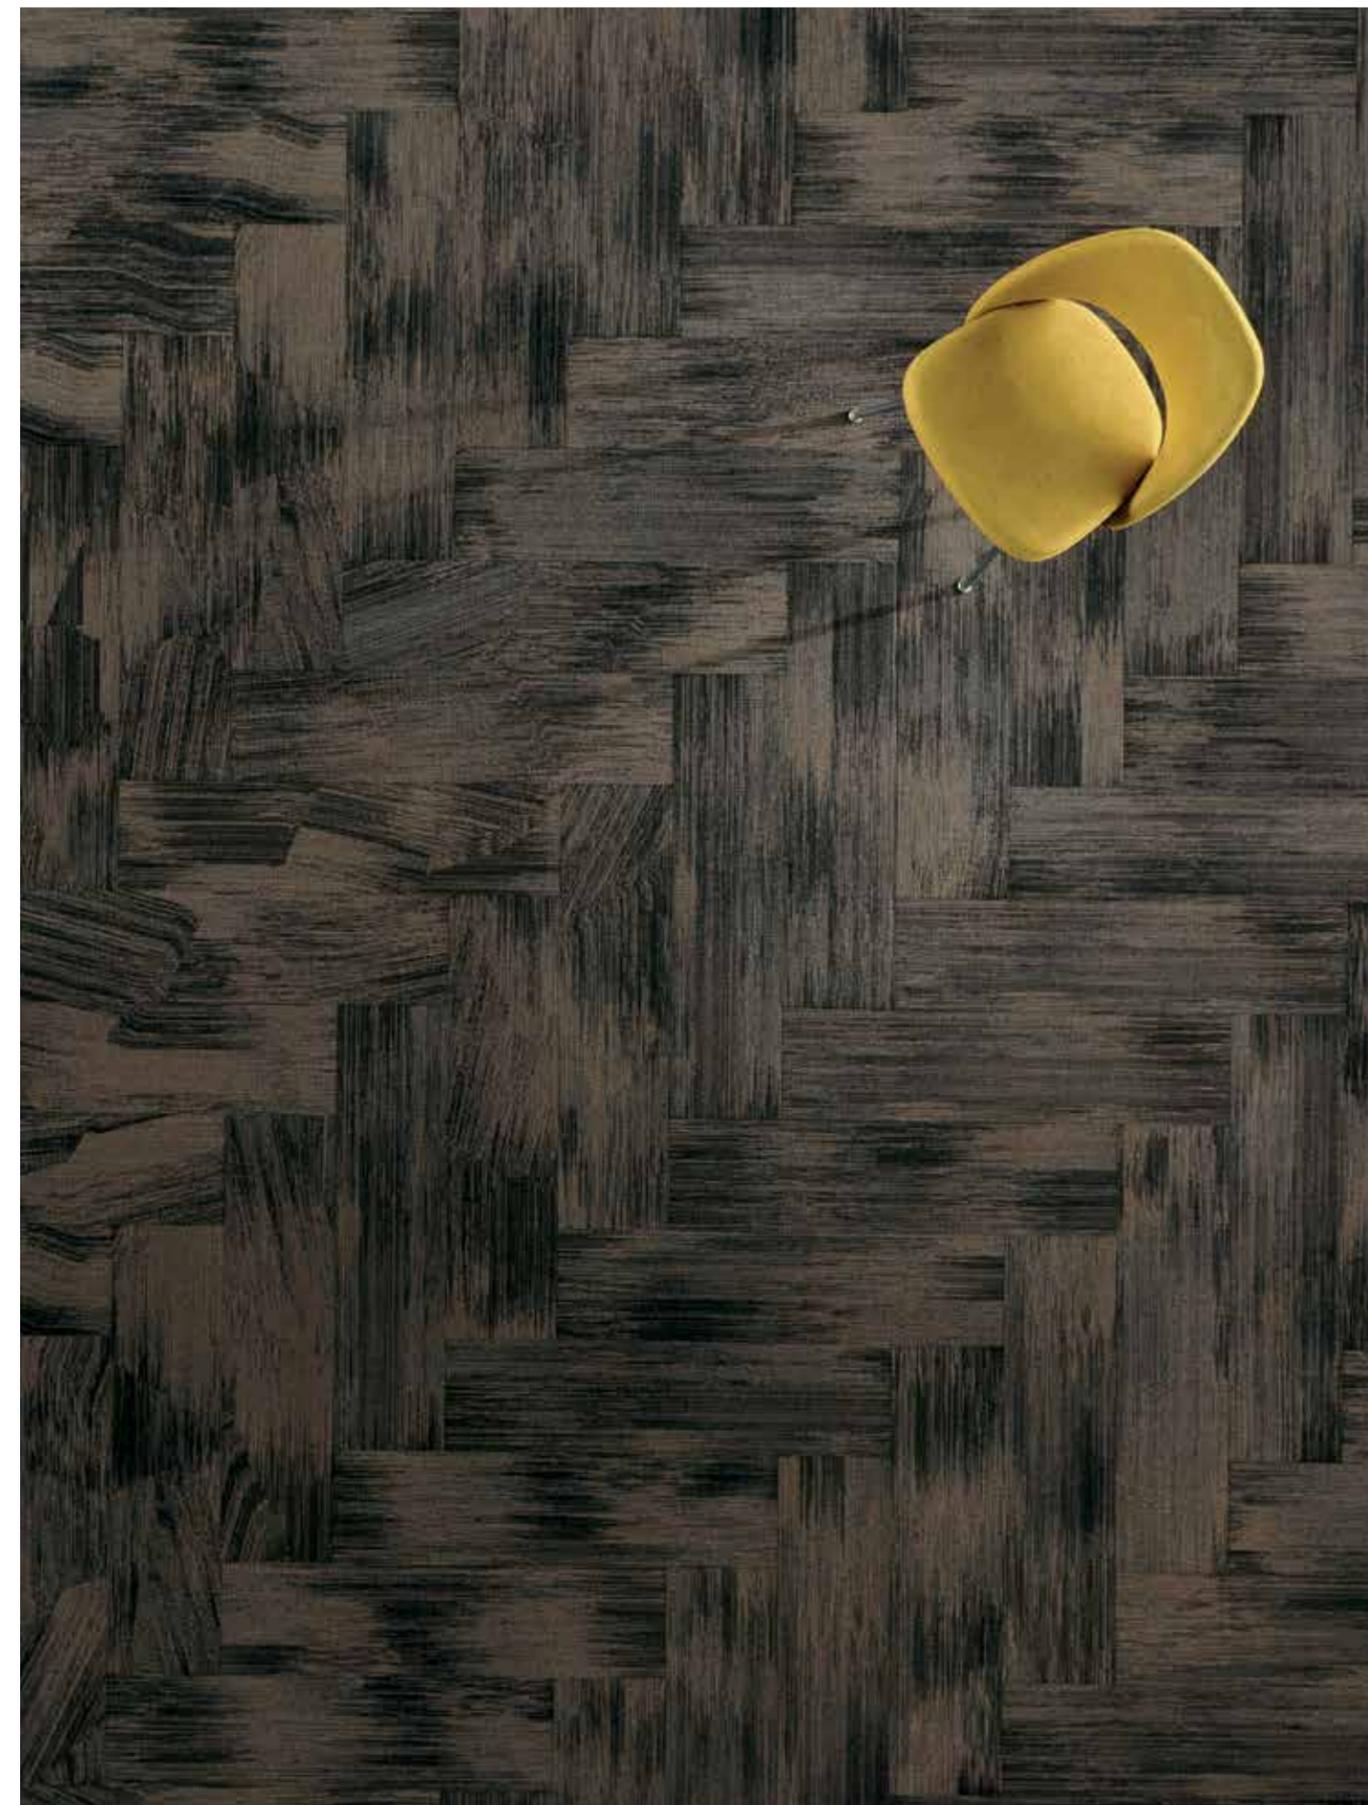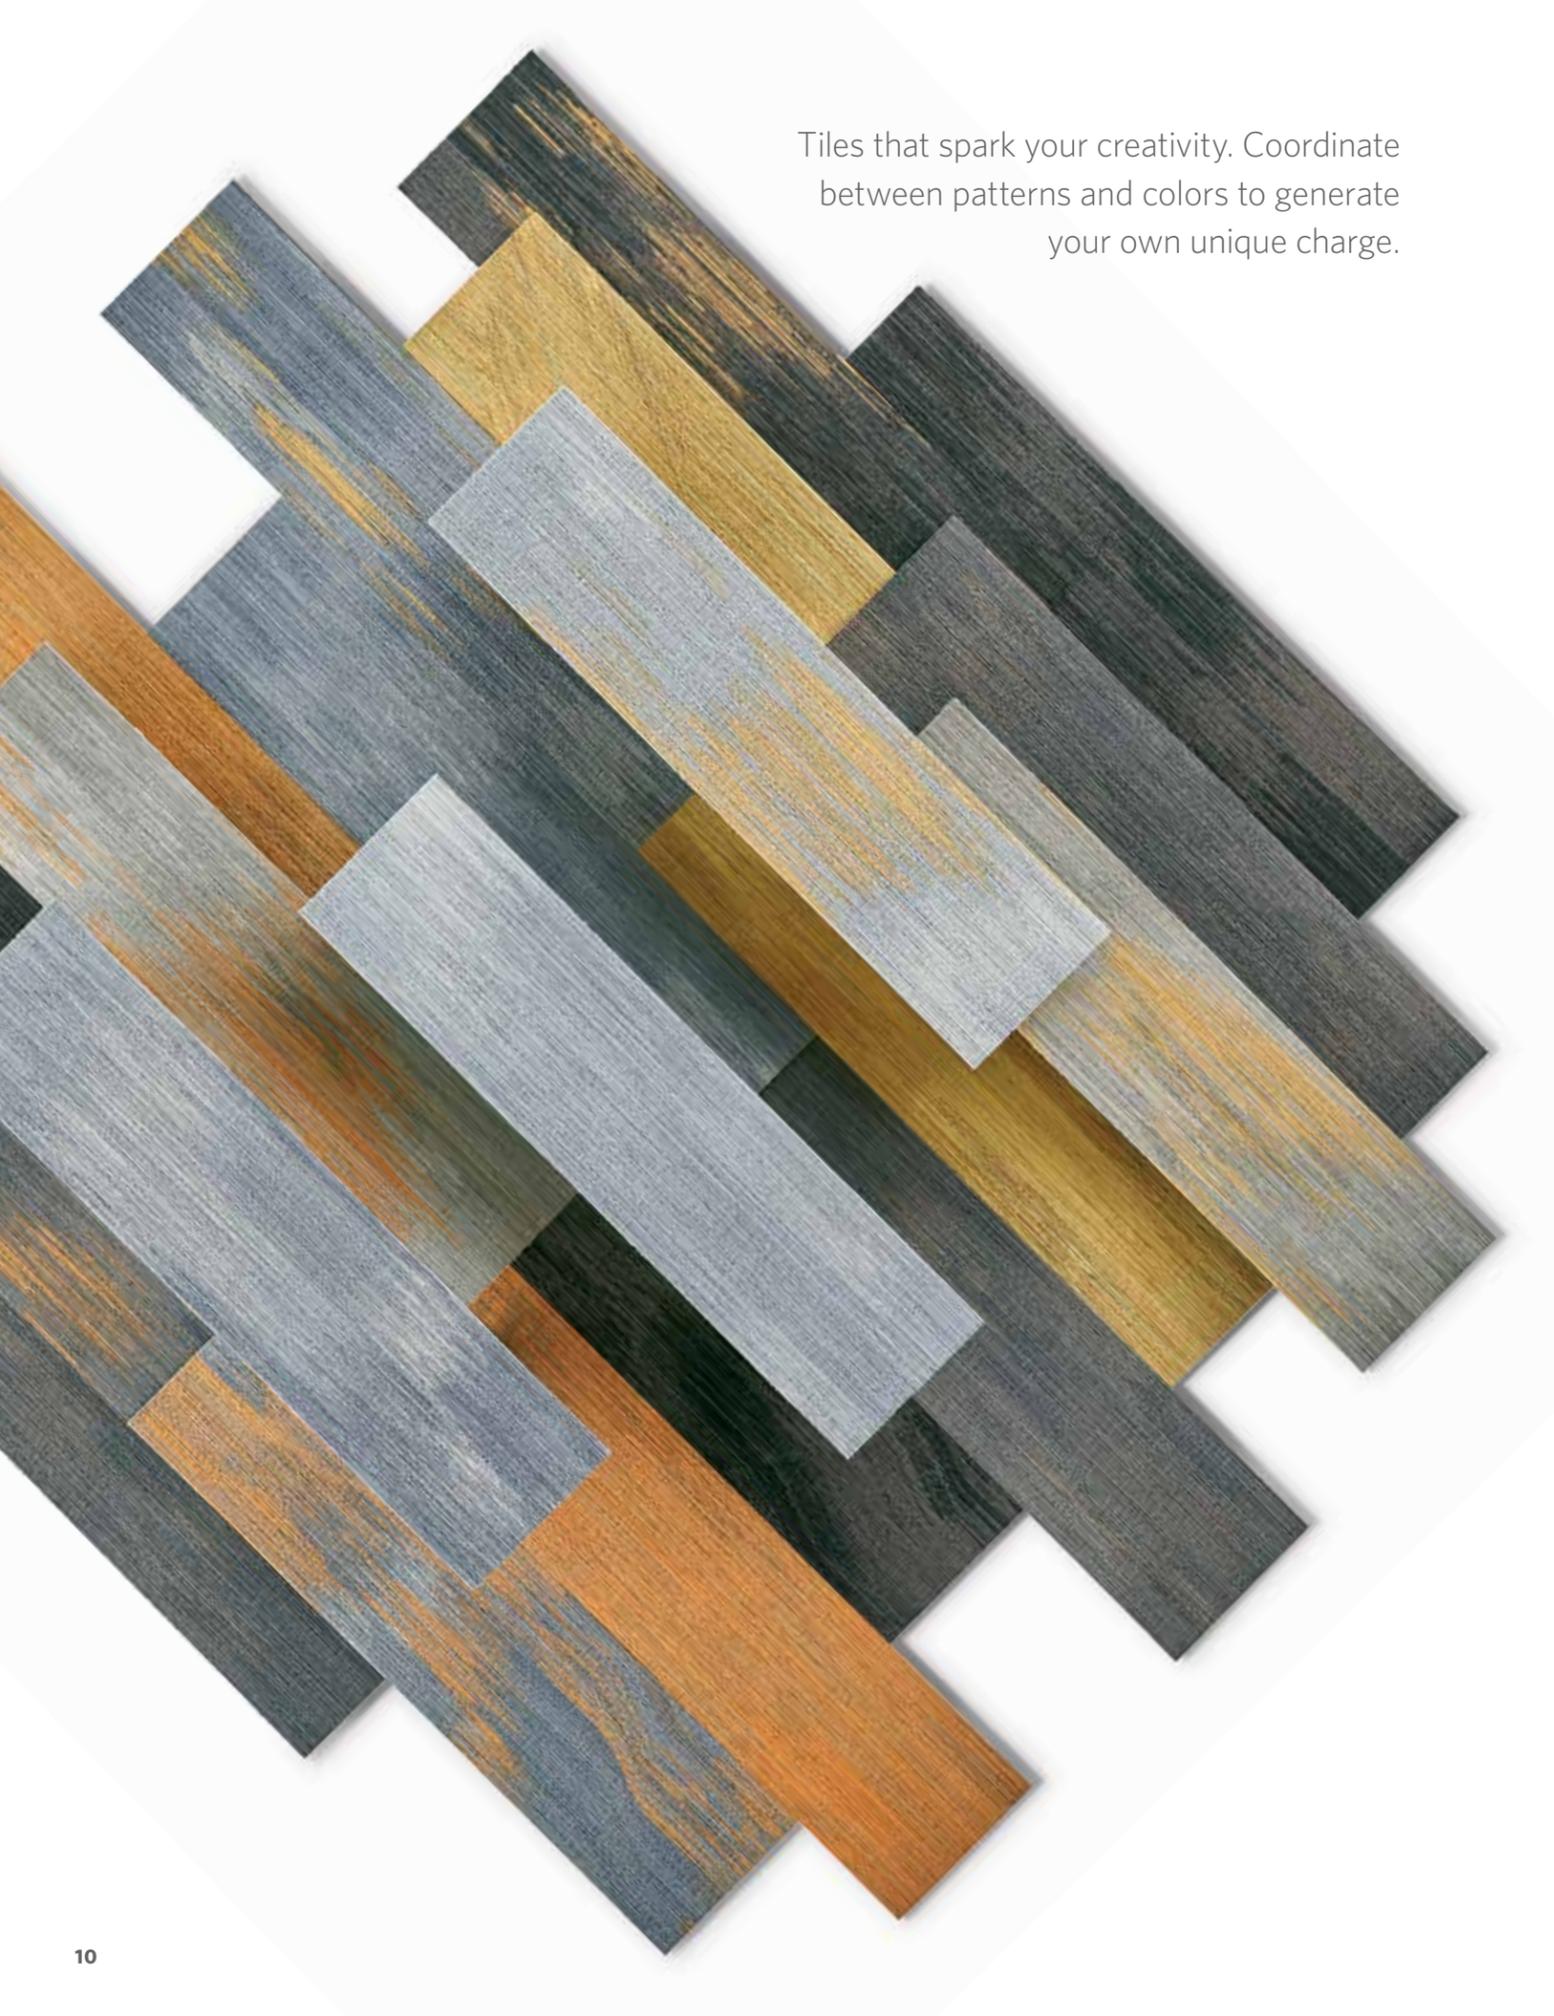




12 Surge in Strike SUR106. 25cm x 1m planks. Vertical ashlar.

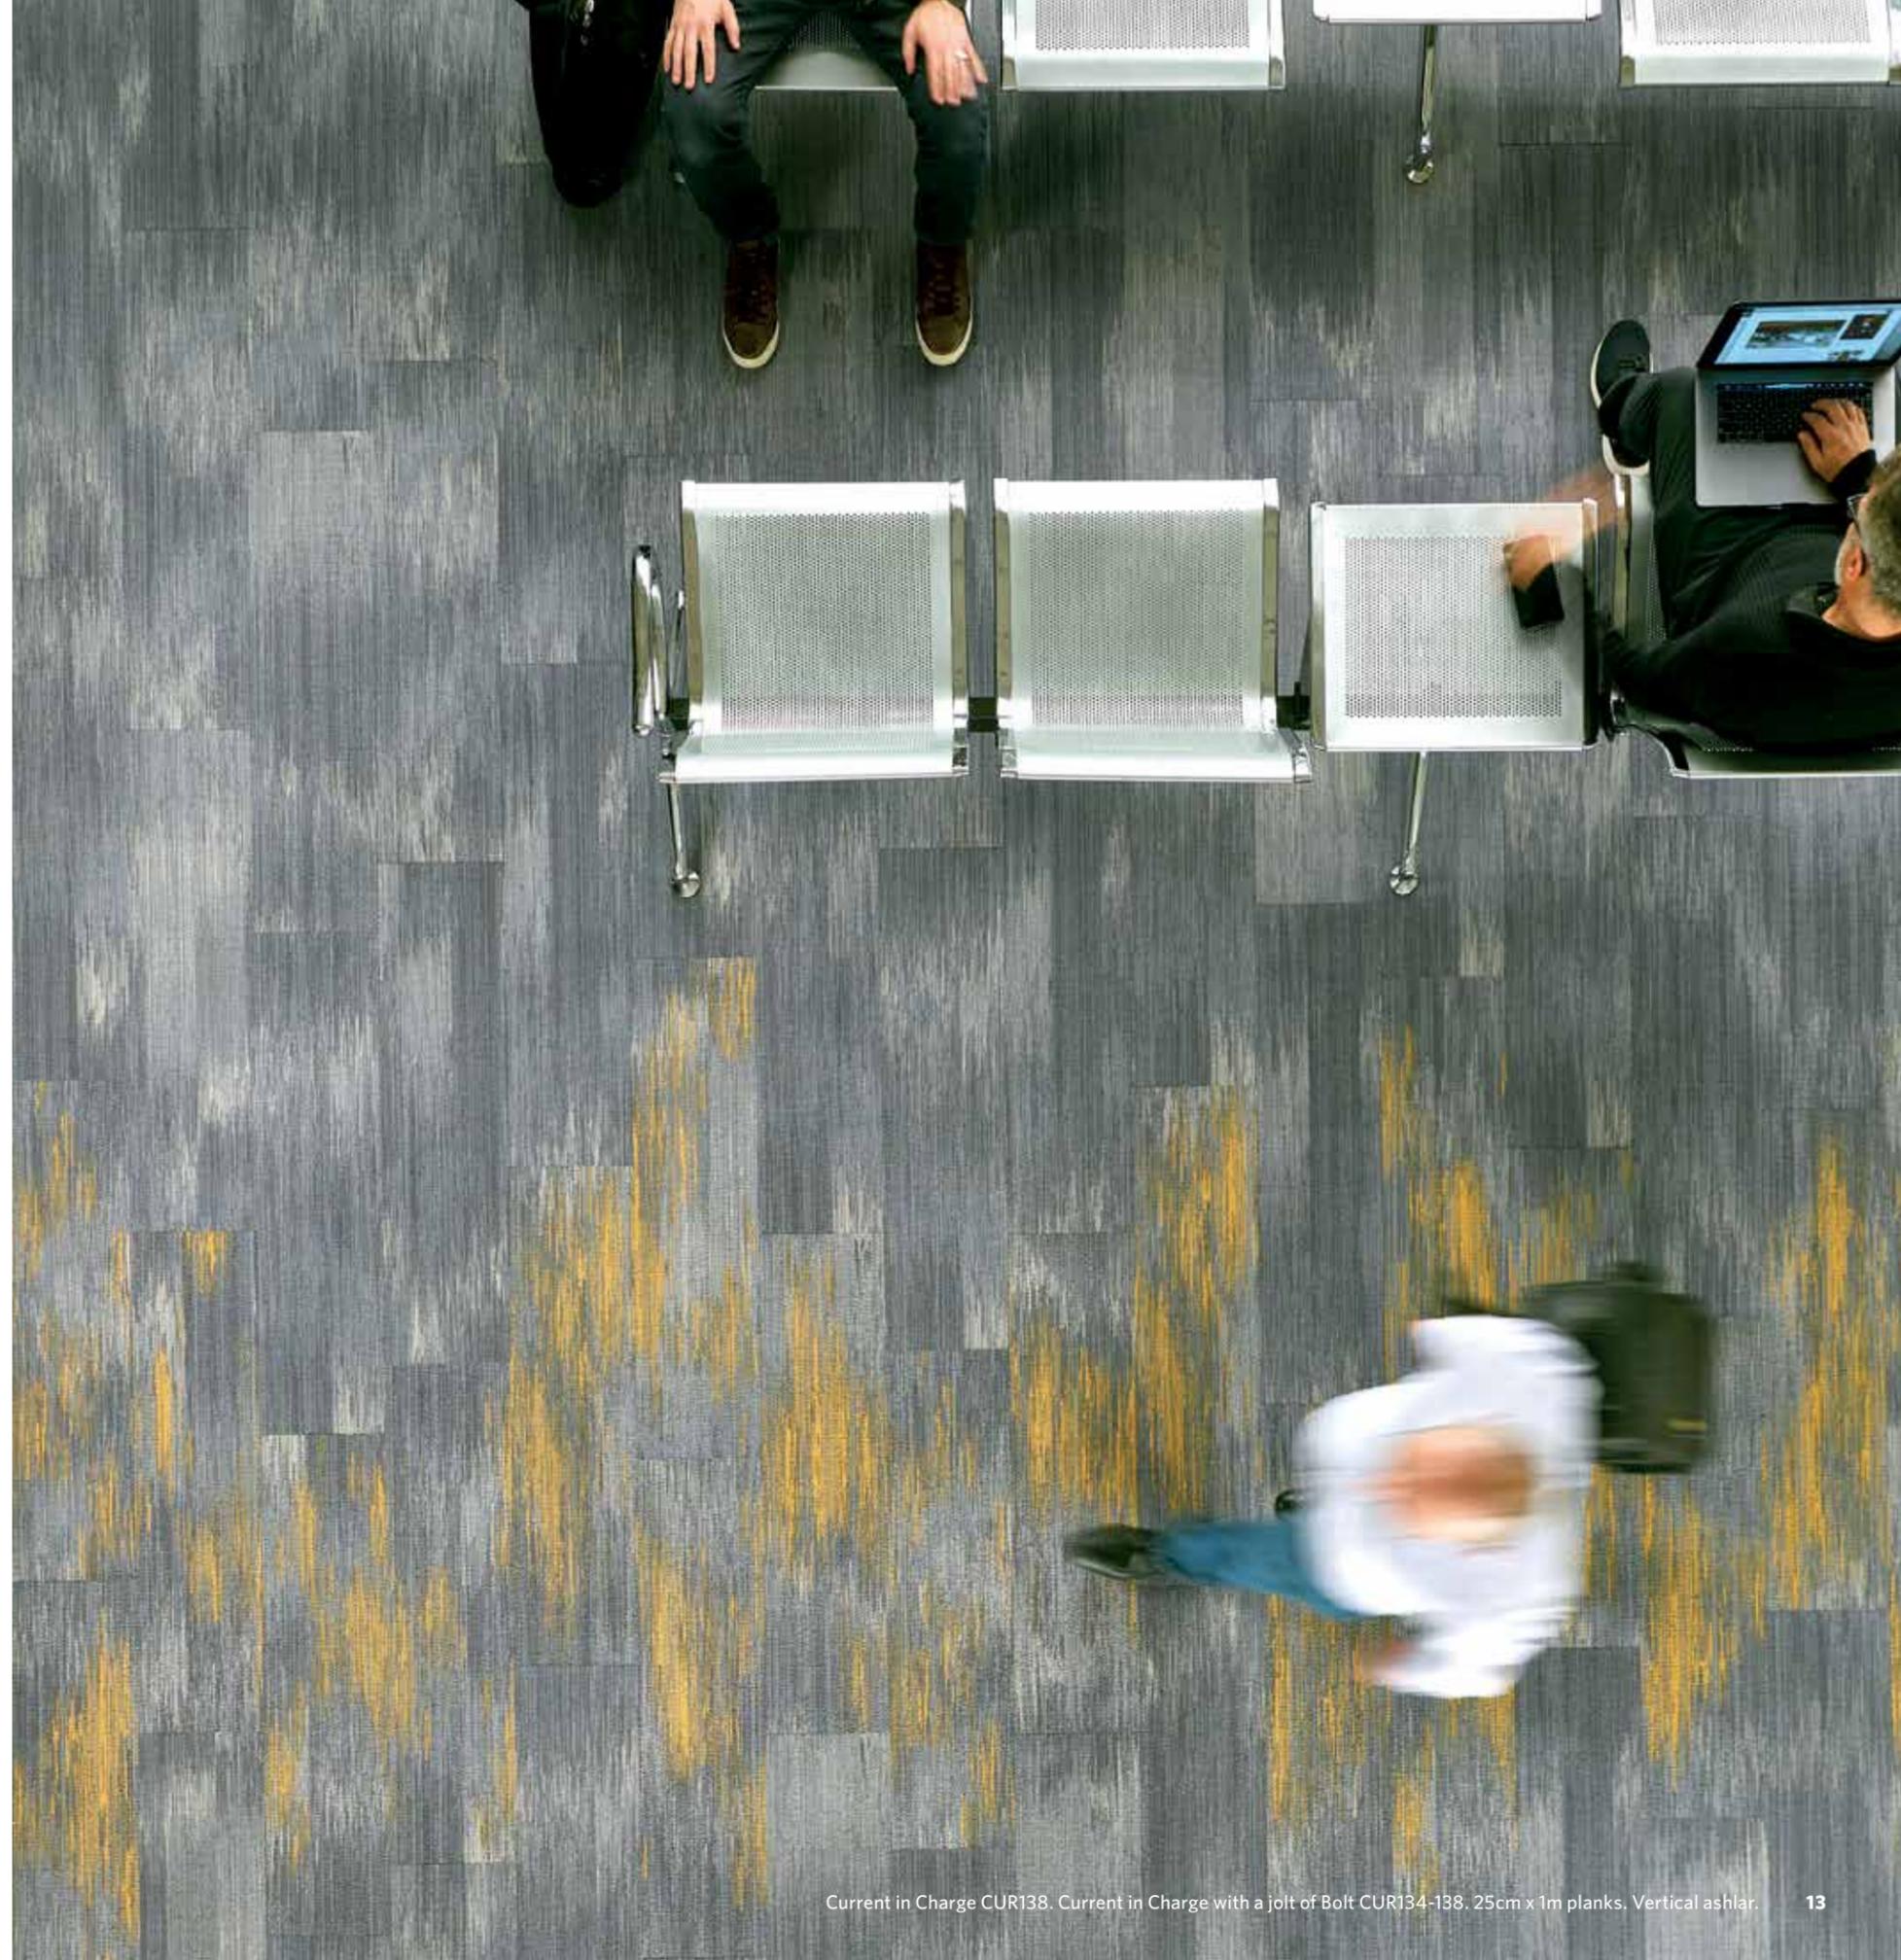

Current in Charge CUR138. Current in Charge with a jolt of Bolt CUR134-138. 25cm x 1m planks. Vertical ashlar. 13

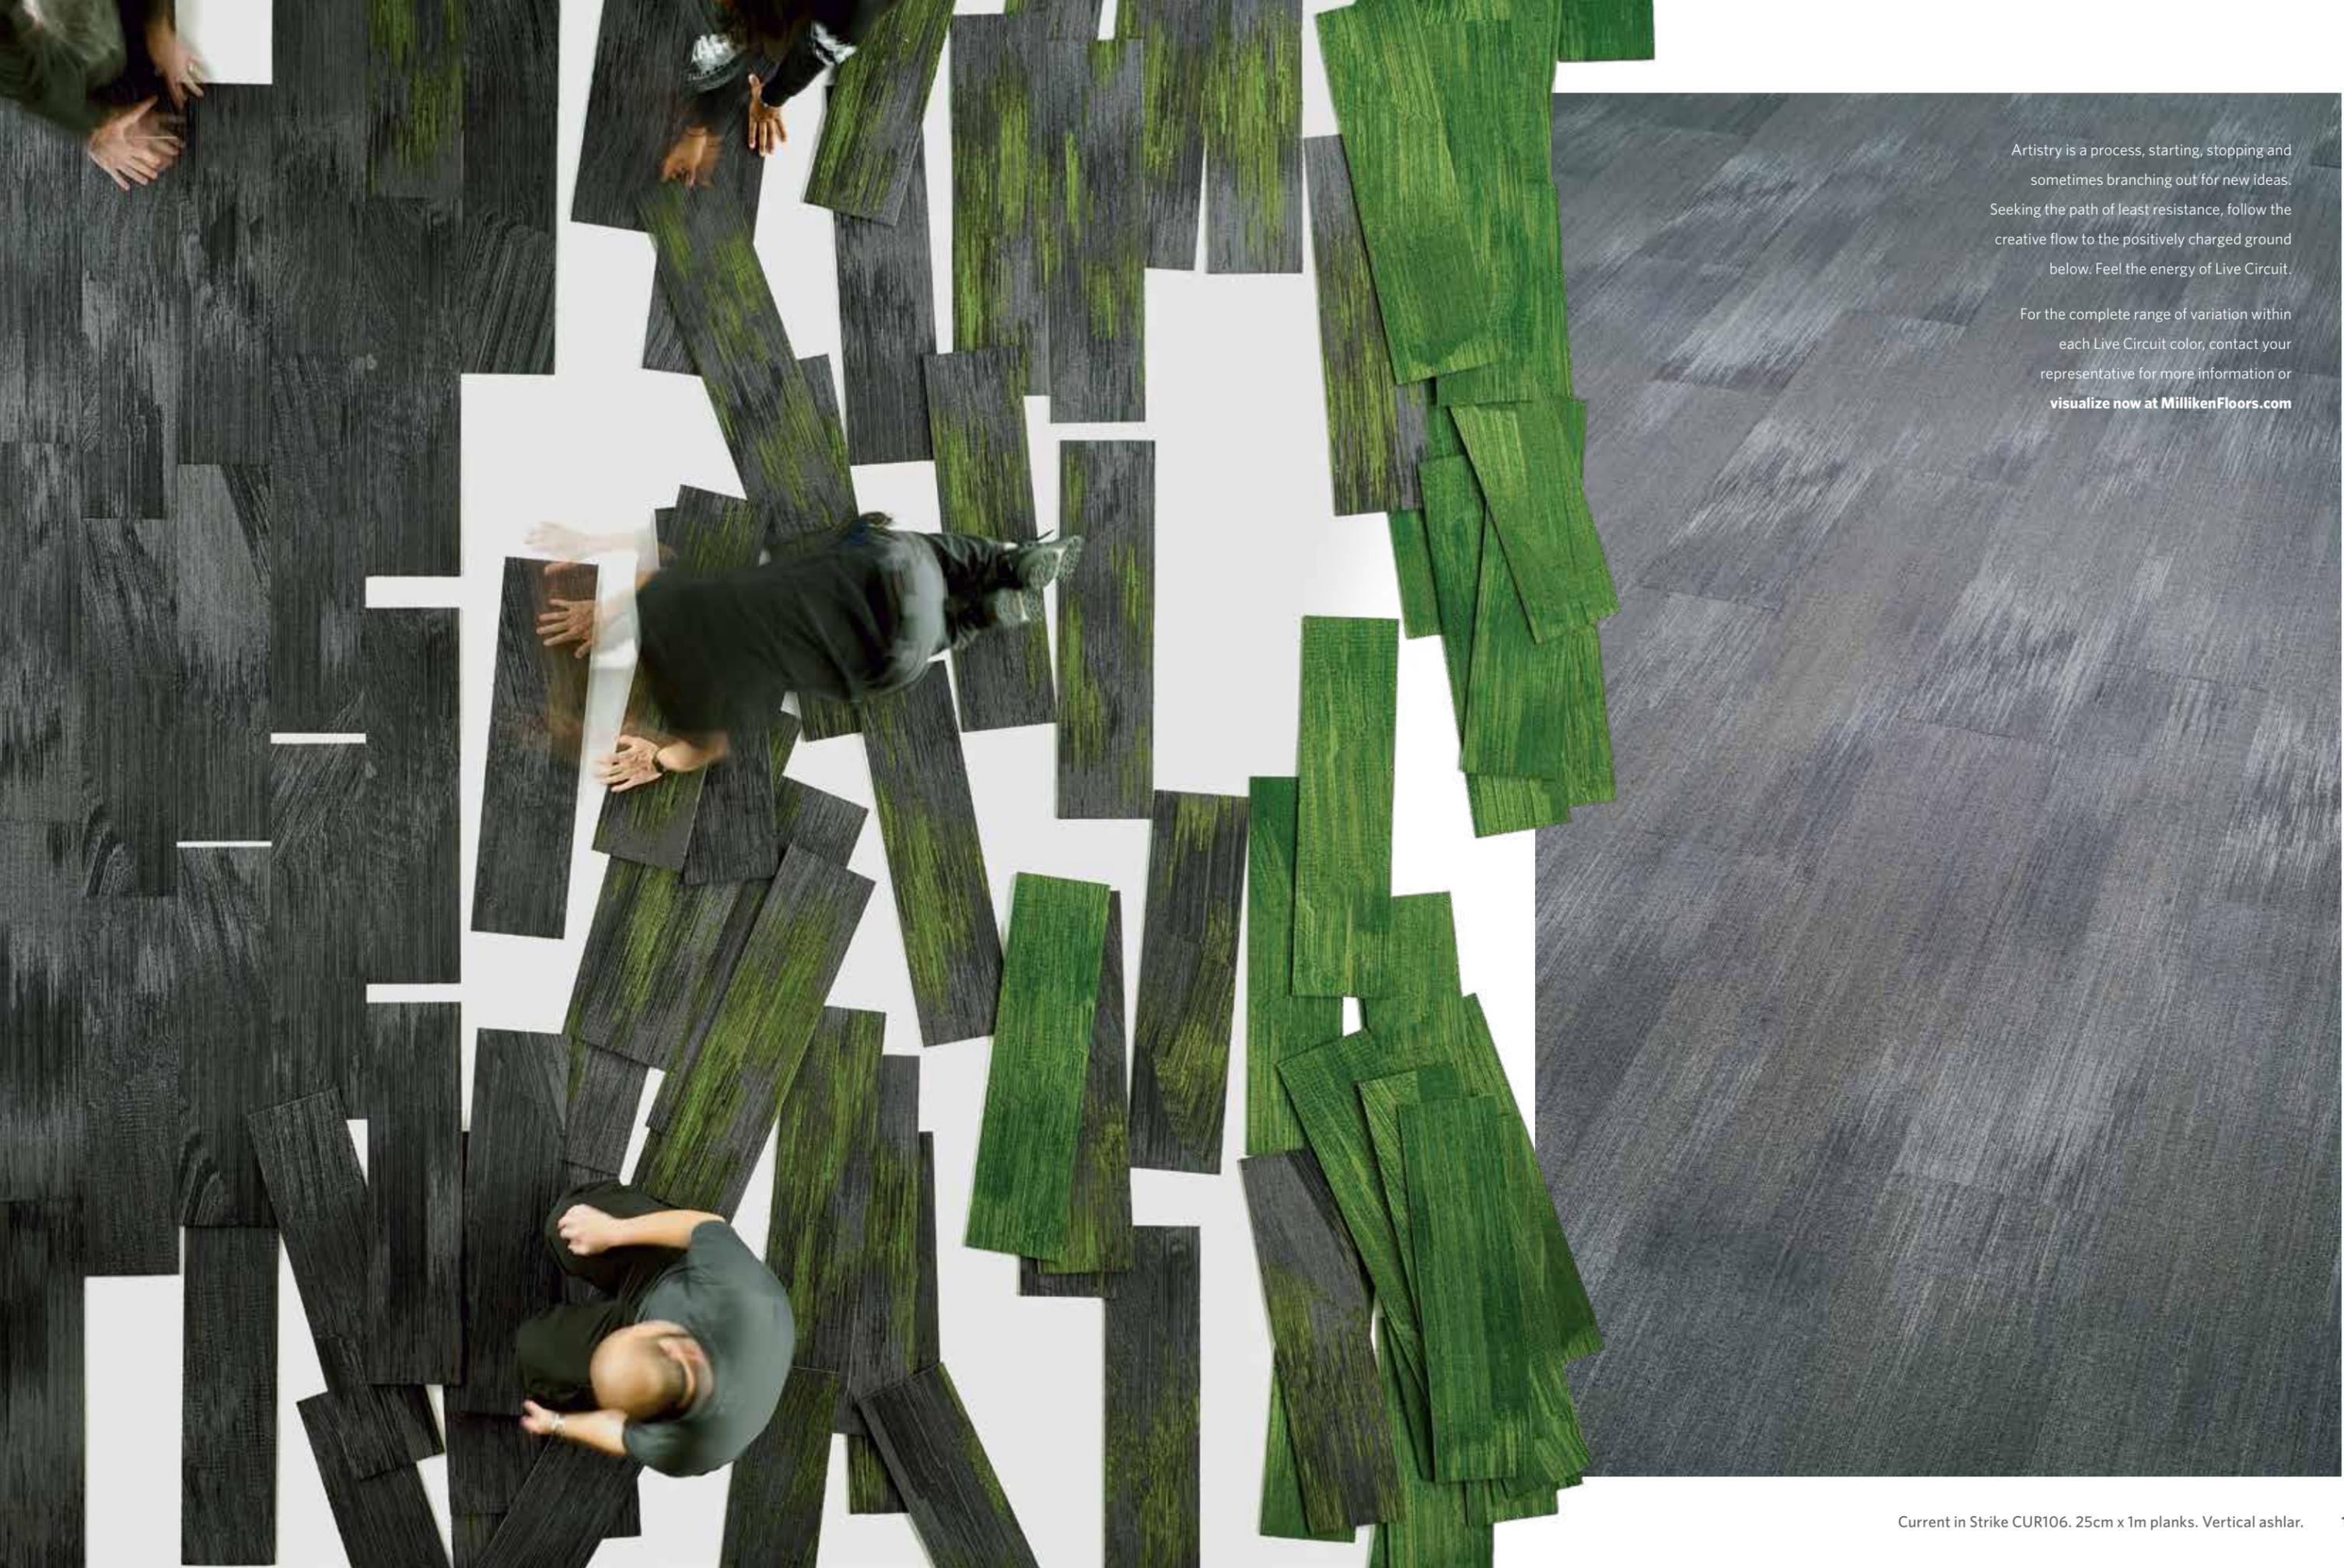

Artistry is a process, starting, stopping and sometimes branching out for new ideas. Seeking the path of least resistance, follow the creative flow to the positively charged ground below. Feel the energy of Live Circuit.

For the complete range of variation within each Live Circuit color, contact your representative for more information or **visualize now at [MillikenFloors.com](https://www.millikenfloors.com)**





COLOR LINE IN CURRENT



CUR153 PROTON  
CUR138 CHARGE  
CUR106 STRIKE  
CUR218 AMP  
CUR259 PARTICLE  
CUR133 STATIC



CUR264 ION  
CUR154 FUSE  
CUR118 BEAM  
CUR13 OCTANE  
CUR120 STROBE  
CUR119 CHROMA



CUR183 ELECTRO  
CUR266 ENERGY  
CUR134 BOLT  
CUR135 MEGA  
CUR109 SMOLDER  
CUR66 SONIC

COLOR LINE IN SURGE



SUR153 PROTON  
SUR138 CHARGE  
SUR106 STRIKE  
SUR218 AMP  
SUR259 PARTICLE  
SUR133 STATIC




SUR264 ION  
SUR154 FUSE  
SUR118 BEAM  
SUR13 OCTANE  
SUR120 STROBE  
SUR119 CHROMA




SUR183 ELECTRO  
SUR266 ENERGY  
SUR134 BOLT  
SUR135 MEGA  
SUR109 SMOLDER  
SUR66 SONIC

JOLTS



ELECTRO



ENERGY



BOLT



MEGA



SMOLDER



SONIC



# STYLE BACKED BY PERFORMANCE

Milliken Floor Covering offers products and expertise in all areas of your commercial spaces, including high-performance entryway systems, modular and broadloom carpet, and resilient flooring. Simplify your flooring projects by working with a trusted partner that lets you focus on enjoying the process of creating a great space.



## WARRANTY

Our products are backed by lifetime commercial warranties that ensure quality and give peace of mind.



## SUSTAINABILITY

Milliken carpet, LVT, and entrance flooring tiles are carbon neutral everywhere in the world. As part of our M/PACT™ carbon neutral program, great care is taken when selecting materials, our carpet materials are Red List Free and PVC Free.



## MOISTURE MANAGEMENT

Milliken modular carpet is a moisture mitigation solution all by itself. Our carpet's WellBAC® open-cell backing allows the floor to breathe and moisture to evaporate, unlike hardback products.



## STAINSMART®

StainSmart provides lifetime resistance for your carpet against penetrating stains and soil.



## WELLBAC® CUSHION

WellBAC® cushion provides superior underfoot comfort while improving the carpet's durability and offering ergonomic, acoustic and environmental benefits.



## TRACTIONBACK®

Our bio-based, high-friction coating keeps carpet tiles securely in-place without additional adhesives, eliminating the need to prime or seal the floor, thereby reducing installation time and costs.



# LIVE CIRCUIT

Current / Surge

**Construction**  
Tufted,  
Textured Loop

**Tile Size**  
25 cm x 1 m (9.85" x 39.4")

**Yarn Type**  
Milliken-Certified WearOn®  
Nylon

**Stain Resist / Soil Release**  
StainSmart®

**Finished Pile Height**  
0.13" (3.3 mm)

**Finished Pile Thickness**  
0.08" (2.03 mm)

**Average Density**  
6,541

**Standard Backing**  
PVC-Free WellBAC®  
Comfort Cushion  
Available with  
TractionBack®

**Texture Appearance  
Retention Rating (TARR)**  
Severe Traffic End-Use  
Applications

**Recommended Installation  
Method(s)**  
All Plank Methods



## SUSTAINABLE FEATURES

**Live Circuit** is manufactured with WellBAC® Comfort cushion backing, and is certified NSF-140 Gold with 39.3% pre-consumer recycled content by total weight. **Live Circuit** is also available with our NSF-140 Platinum backing option. All Milliken modular carpets carry Environmental Product Declarations and Health Product Declarations, which contribute to LEED certification. Additionally, Milliken modular carpets carry Declare® transparency labels and comply with the Red List Imperative of the Living Building Challenge.™



## M/PACT™ CARBON NEUTRAL PRODUCT

M/PACT carbon neutral products offset the raw materials and manufacturing carbon footprint\* by using 3rd party Verified Carbon Standard Credits that support renewable energy and carbon reduction technologies to help fight climate change. When you choose M/PACT products, you can be sure your choice is carbon neutral.

### TRACTIONBACK®

Simplify your modular installation with Milliken's patented TractionBack®, an innovative backing system that is faster, more cost efficient, and environmentally superior to wet adhesives and peel-and-stick carpet tile.

Scan to explore the collection story.

### SHOWN ON THE COVER

(Front) Current in Static CUR133 and Surge in Static SUR133. (Back) Current in Strobe CUR120 and Current in Strobe with a jolt of Electro CUR183-120.



\* As calculated and verified scope A1-3 GWP through a ISO14025/ISO14040 compliant LCA and published in third party EPDs.

Images in this brochure and architect folder are approximate for color and pattern scale. Please use actual carpet samples to make your final selections.

Milliken™